



MASTER TL-D Super 80

MASTER TL-D Super 80 18W/865 1SL

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T8 [26 mm]
Life to 10% failures EM	12000 hr
Life to 10% fail	17000 hr
Preheat EL,3h	
Life to 10% fail	10000 hr
Nonpreh EL,3h	
Life to 50% failures EM	15000 hr
Life to 50% fail	20000 hr
Preheat EL,3h	
Life to 50% fail	12000 hr
Nonpreh EL,3h	
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 12000h Rated,3h cycle	89 %
LSF EM 16000h Rated,3h cycle	33 %
LSF EM 20000h Rated,3h cycle	2 %

• Light Technical Characteristics

Color Code	865 [CCT of 6500K]
Color Rendering Index	85 Ra8
Color Designation (text)	Cool Daylight

Color Temperature	6500 K
Luminous Flux EM	1300 Lm
25°C, Rated	
Luminous Flux EM	1300 Lm
25°C, Nominal	
Lum Efficacy Rated EM 25°C	72 Lm/W
Luminance Average EM	0.95 cd/cm2
LLMF EM 2000h Rated	96 %
LLMF EM 4000h Rated	95 %
LLMF EM 6000h Rated	94 %
LLMF EM 8000h Rated	93 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	91 %
LLMF EM 20000h Rated	90 %
Design Temperature	25 C
Chromaticity Coordinate X	313 -
Chromaticity Coordinate Y	337 -

• Electrical Characteristics

Lamp Wattage	18 W
Lamp Wattage EM	18 W
25°C, Nominal	
Lamp Wattage EM	18.0 W
25°C, Rated	

MASTER TL-D Super 80

Lamp Voltage EM 25°C	59 V
Lamp Current EM 25°C	0.360 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	2.0 mg
Energy consumption kWh/1000h	22 kWh

• Product Dimensions

Base Face to Base Face A	589.8 (max) mm
Insertion Length B	594.5 (min), 596.9 (max) mm
Overall Length C	604 (max) mm

Diameter D	28 (max) mm
------------	-------------

• Product Data

Order code	927920086544
Full product code	927920086544
Full product name	MASTER TL-D Super 80 18W/865 1SL
Order product name	MASTER TL-D Super 80 18W/865 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500631770
Bar code on outerbox - EAN3	8711500631787
Logistic code(s) - 12NC	927920086544
ILCOS code	FD-18/65/1B-E-G13
Net weight per piece	71.000 gr

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing



MASTER TL-D Super 80 18W/865 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 18W/865	589.8	594.5	596.9	604	28

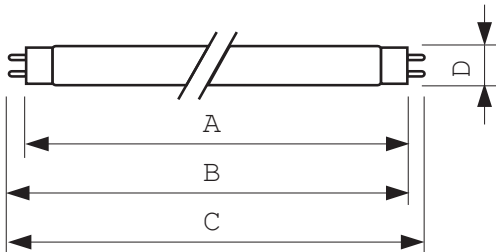

G13

Photometric data

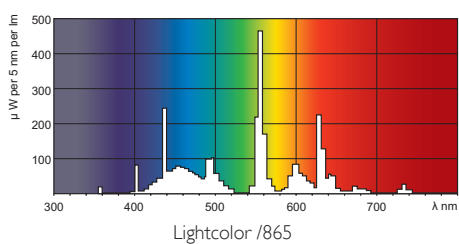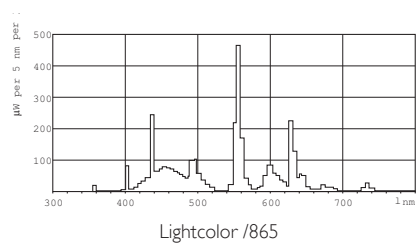

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change