



SPECIFICATION SHEET : TL1MLT012-10-L

This Is An Original Product From Fulham Co., Inc


Description : Independent direct current power supply. High efficiency and reduced weight and size. Steady output voltage. Wide range input 95 ~ 240 Volt. Equipped with screw terminals suitable for 0, 5 ~ 2, 5 mm² section cables. Double terminal on primary circuit (Max current 5A)

This Driver Will Operate Following LED Lamps.
High Power LED up to 550mA

ELECTRICAL DATA

Input Volt : 95V ~ 240V ± 10% , 50/60Hz	
Output current (Max)	550 mA
Output voltage	12V
Output power (Max)	6.6W
Ambient temperature Ta	35°C
Max temperature on Tc dot	85°C
Thermal protection	yes
Overload protection	yes
Overcurrents protection	yes
Short Circuit protection	yes
Input cables	18 AWG
Output cables section	0.5 ~ 2.5 mm ²
Application	Dry Location Use Only
Approval/ Class	UR /cUR Recognised Component/ Class 2
Weight (gms)	60
Dimensions (mm)	34x115x19
Packaging	50/pcs

MECHANICAL DATA

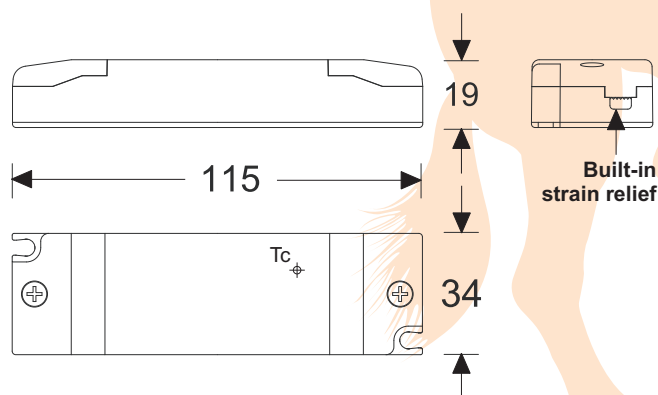

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

