



TL-M Rapid Start Standard Colours

TL-M RS 40W/33-640 SLV/25

The TL-M RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating and an external ignition strip. It is suitable for situations where low temperatures and high humidity require fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Product data

General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Power (Rated) (Nom)	39.5 W
Life to 50% Failures (Nom)	13000 h	Lamp Current (Nom)	0.430 A
System Description	Rapid Start	Voltage (Nom)	101 V
Light Technical		Controls and Dimming	
Color Code	33-640	Dimmable	Yes
Luminous Flux (Nom)	2850 lm	Approval and Application	
Color Designation	Cool White (CW)	Energy Efficiency Label (EEL)	A
Lumen Maintenance 10000 h (Nom)	73 %	Mercury (Hg) Content (Nom)	8.0 mg
Lumen Maintenance 2000 h (Nom)	90 %	Energy Consumption kWh/1000 h	47 kWh
Lumen Maintenance 5000 h (Nom)	81 %	Product Data	
Chromaticity Coordinate X (Nom)	377	Full product code	871150072429840
Chromaticity Coordinate Y (Nom)	381	Order product name	TL-M RS 40W/33-640 SLV/25
Correlated Color Temperature (Nom)	4100 K	EAN/UPC - Product	8711500724298
Luminous Efficacy (Rated) (Nom)	72 lm/W	Order code	928030503371
Color Rendering Index (Nom)	63	Numerator - Quantity Per Pack	1

TL-M Rapid Start Standard Colours


Numerator - Packs per outer box	25
Material Nr. (12NC)	928030503371
Net Weight (Piece)	273.600 g

ILCOS Code	FD-40/41/2B-LC/P-G13
------------	----------------------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-M RS 40W/33-640 SLV/25	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-M 40W/33-640 RS

Photometric data

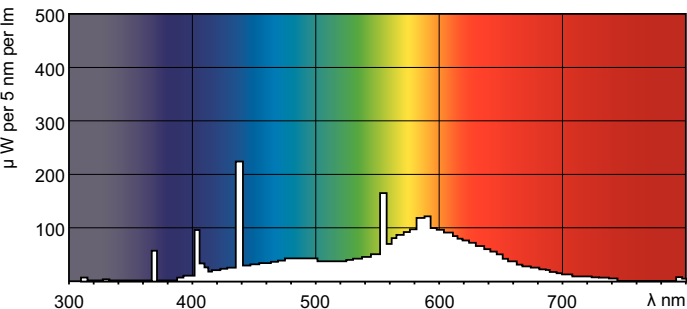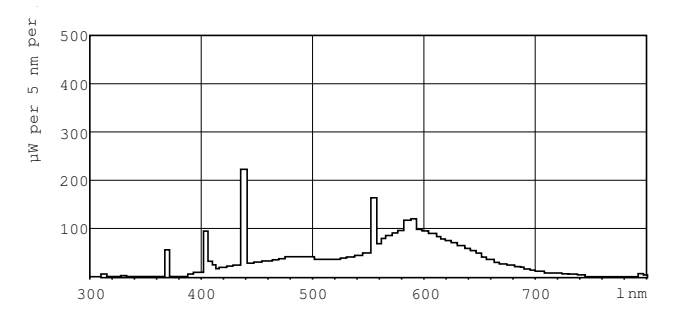

Lightcolor /33-640

Lightcolor /33-640

