

TL-D LIFEMAX Super 80

TL-D 30W/865 1SL/25

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h
Life To 50% Failures Preheat (Nom)	20000 h

Light Technical	
Color Code	865 [CCT of 6500K]
Luminous Flux (Rated) (Nom)	2300 lm
Color Designation	Cool Daylight
Lumen Maintenance 2000 h (Nom)	96 %
Lumen Maintenance 5000 h (Nom)	94 %
Chromaticity Coordinate X (Nom)	313
Chromaticity Coordinate Y (Nom)	338
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Color Rendering Index (Nom)	80

Operating and Electrical	
Power (Rated) (Nom)	30 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Cap-Base Information	Green Cap

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg

Product Data	
Full product code	871150028592800
Order product name	TL-D 30W/865 1SL/25
EAN/UPC - Product	8711500285928
Order code	927981286536
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927981286536
Net Weight (Piece)	0.130 kg

TL-D LIFEMAX Super 80

Dimensional drawing

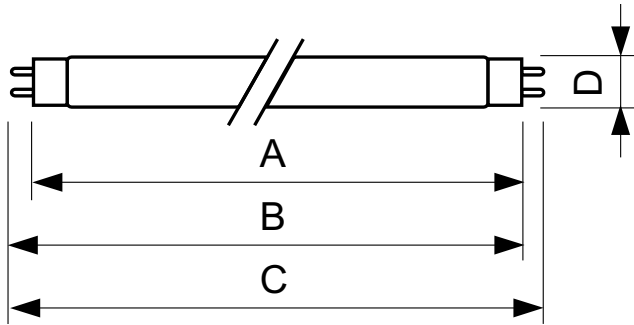

TL-D 30W/865/GC

Product	D	A	B	B	C
TL-D 30W/865 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

Photometric data

