



TL-X XL

TL-X XL 40W/33-640 1SL

The TL-X XL lamp (tube diameter 38 mm) has an extended lifetime and is fitted with an internal ignition strip for electromagnetic starterless operation or high-frequency non-preheat operation. In combination with a special lampholder, all possible sparking effects during ignition are eliminated. This lamp is used in flameproof and increased-safety luminaires for both indoor and outdoor applications, such as the (petro-)chemical industry, offshore, mines and any location where traces of explosive gases may be found.

Product data

• General Characteristics

Cap-Base	Fa6
Bulb	T12 [38 mm]
Life to 10% failures EM	21000 hr
Life to 50% failures EM	26000 hr

• Light Technical Characteristics

Color Code	33-640
Color Rendering Index	63 Ra8
Color Designation (text)	Cool White
Color Temperature	4100 K
Luminous Flux Lamp EM	2300 Lm
Luminous Efficacy Lamp EM	58 Lm/W
Lumen Maintenance 2000h	88 %
Lumen Maintenance 5000h	83 %
Lumen Maintenance 10000h	0 %
Luminance Average EM	0.59 cd/cm ²
Chromaticity Coordinate X	377 -
Chromaticity Coordinate Y	381 -

• Electrical Characteristics

Lamp Wattage	40 W
Lamp Wattage EM	39.0 W

Lamp Voltage	103 V
Lamp Current EM	0.430 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	12.0 mg
Energy consumption kWh/1000h	47 kWh

• Product Dimensions

Base Face to Base Face A	1183.5 (max) mm
Insertion Length B	1198.5 (min), 1202 (max) mm
Overall Length C	1220.5 (max) mm
Diameter D	40.5 (max) mm


• Product Data

Order code	928037903332
Full product code	928037903332
Full product name	TL-X XL 40W/33-640 1SL
Order product name	TL-X XL 40W/33-640 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500261373
Bar code on outerbox - EAN3	8711500261380
Logistic code(s) - 12NC	928037903332
ILCOS code	FD-40/41/2B-LC/N-Fa6

PHILIPS


Net weight per piece 233.000 gr

Dimensional drawing

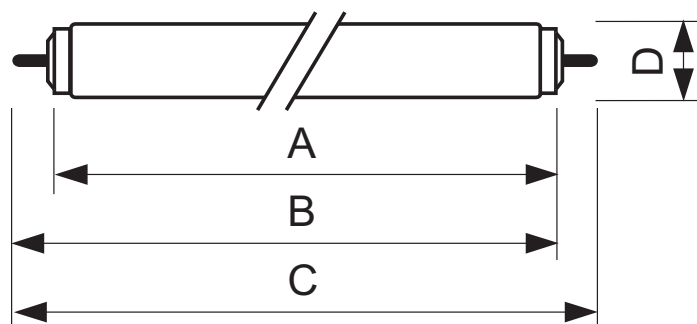



TL-X XL 40W/33-640 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-X XL 40W/33-640	1183.5	1198.5	1202	1220.5	40.5



Fa6

Photometric data

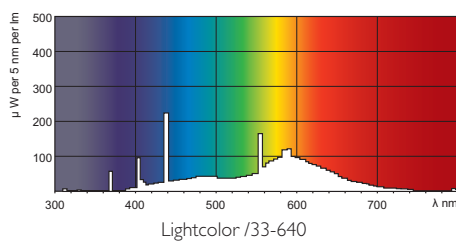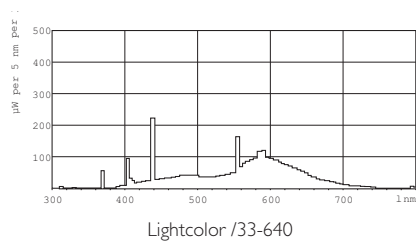

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, April 15
data subject to change