

TP120

Specifications:

Maximum Wattage	750 W
Maximum Voltage	250 V
Maximum Operating Temperature	225° C
Qualifications	UL Recognized – E31557 CSA Certified – LR20904
Body Material	Steatite / Mica
Contact Material	High Temperature Nickel Alloy
Wire Leads	AWG 18/16, 300 V/150° C minimum



Single End

ORDERING INFORMATION




Product Number	Product Description	Wire Gauge/Type/Color	Wire Length (inches)	Case / SKU Qty Qty
69740	TP120 6IN/18GA/ULSF1	AWG18/ULSF1/White	6	200 / 200
69746	TP120 6IN/18GA/UL1726	AWG18/UL1726/White	6	200 / 200
69021*	TP120 12IN/18GA/ULSF1	AWG18/ULSF1/White	12	100 / 20
69745	TP120 12IN/18GA/ULSF1	AWG18/ULSF1/Black	12	200 / 200
69741	TP120 18IN/18GA/ULSF1	AWG18/ULSF1/White	18	200 / 200
69742	TP120 18IN/18GA/UL1180	AWG18/UL1180/White	18	200 / 200
69744	TP120 18IN/18GA/ULSF2	AWG18/ULSF2/White	18	200 / 200
69743	TP120 36IN/18GA/ULSF2	AWG18/ULSF2/White	36	200 / 200

*Included in Stocking Program. Other types are made-to-order.

LAMP BASE:

2-Pin Miniature
MR11 & MR16
(.060" dia. round or
.025" flat pins x .210"
ctr. to ctr.)

G5.3, GU5.3, GX5.3,
GY5.3

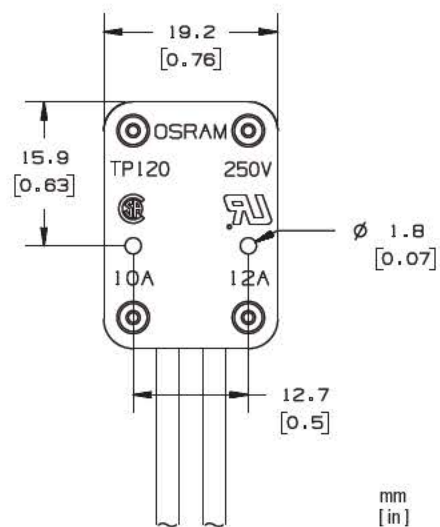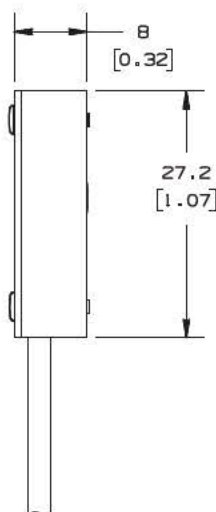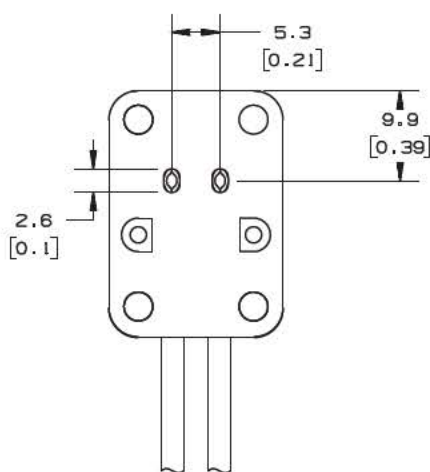

mm
[in]