


TOP VIEW



SIDE VIEW

RUBBER SEAL RING

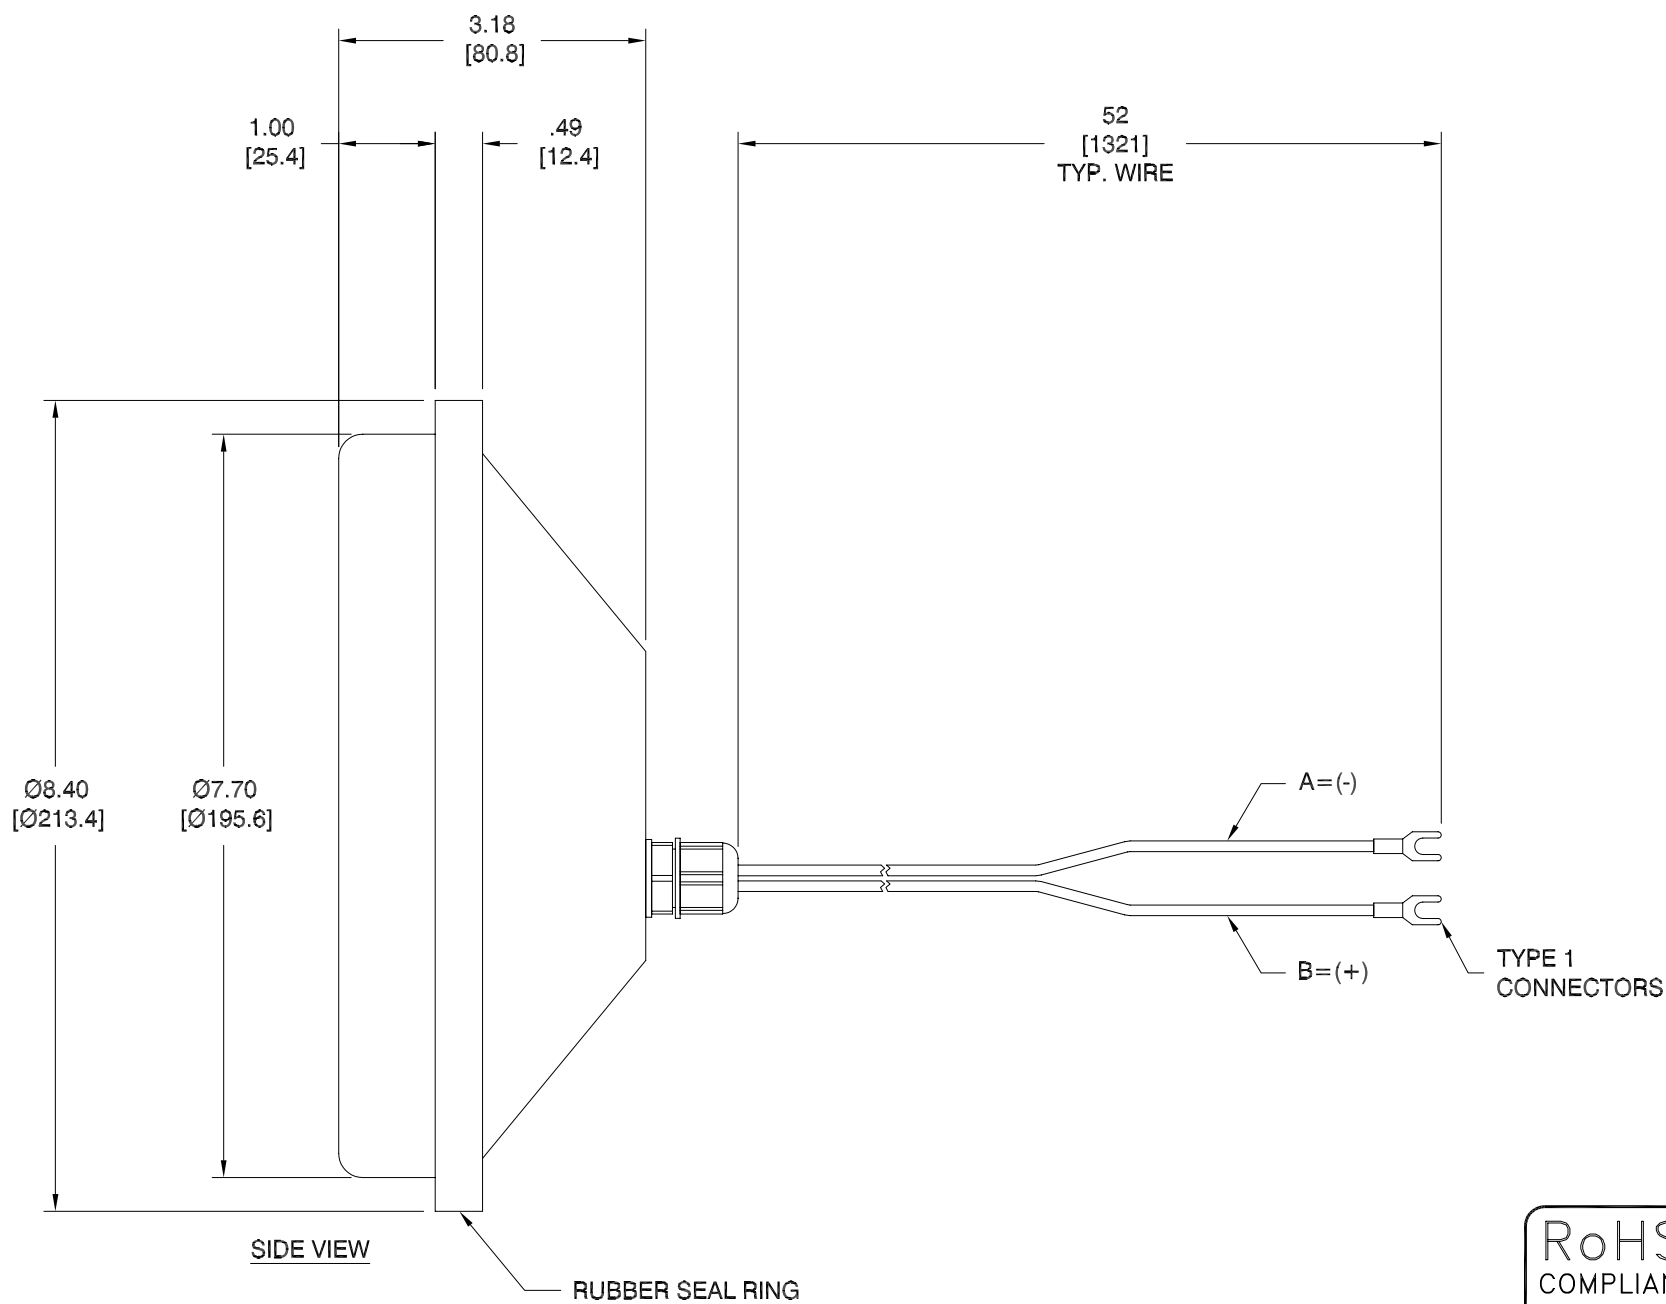

A	WHITE
B	RED, BROWN OR YELLOW
WIRE COLORS	

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

TRF108-0BG-012V	BLUE GREEN	12VDC	0.416	5W	InGaP	UV-RESISTANT POLYCARBONATE	700cd	-40°C ~ 74°C	505	8"
TRF108-0ER-012V	SUPER RED	12VDC	0.250	3W	AllnGaP		400cd	-40°C ~ 74°C	626	8"
TRF108-0PY-012V	SUPER YELLOW	12VDC	0.250	3W	AllnGaP		400cd	-40°C ~ 74°C	590	8"
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	POWER (W)	LED Chip	LENS MATERIAL	INTENSITY, cd	OPERATING TEMPERATURE	λP nm	SIZE
ELECTRICAL TEST										

**LED<sup>®</sup>**  
**LEDTRONICS,™ INC.**  
 23105 KASHIWA COURT  
 TORRANCE, CA 90505

-PROPRIETARY-  
 This document contains Proprietary  
 information of LEDTRONICS,™ INC.  
 It may not be copied, used or disclosed  
 for any purpose without the prior, express  
 written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
 .XX ± .025 (UNLESS OTHERWISE STATED)  
 ANGLES ± 0°.30'  
 FRACT. ± 1/32

TITLE									
TRF108-0XX-012V									
DWG NO		SCALE		SHEET		DATE			
TRF108-003-CUST		1:2		1 OF 1		12-09-11			
CODE IDENT NO.	DWG BY GP	CHK BY PL	QA	MFG	R&D				
8Z410	12-09-11	12-12-11			BJ	12-09-11			