

Series 635, 636 Medium Bi-Pin Quickwire Fluorescent Butt-On Lampholders For T8 and T12 Lamps


UL File No. E36983
CSA File No. LR11209

These butt-on lampholders are molded in black phenolic or white thermosetting urea, and are supplied with 9" #18 AWM 1015 105°C wire. Other types and lengths are available. Lampholders are available with tempered steel snap-in springs or 4-36 tapped holes, or 0.140" diameter slip holes. Mounting screws sold separately, please specify. Leads may be brought out straight or from rear for flush mounting.

- Either snap-in springs, clearance hole, or tapped hole mountings available
- Black phenolic or white thermosetting urea composition
- Circuit interrupting type featuring disconnect

Part Number	Catalog Number/Description
F106635A0002-M	635A with 9" #18 AWM 1015 topcoat leads strip 1/2"
F106635A0005-M	635A with 8" #18 AWM 1015 topcoat leads strip 3/8"
F106635A0006-M	635A with 38" #18 AWM 1015 topcoat leads strip 3/8"
F106635A0013-M	635A 6" #18 AWM 1015 strip 9/16"
F106635A0026-M	635A with 9" #18 AWM 1015 strip 1/2"
F106635A5103-M	635A-51 with 9" #18 AWM 1015 black and white, leads strip 3/8" NOTE: Disconnect lead to be white "A" lead black and "B" lead white
F106636A0008-M	636A with 9" #18 AWM 1015 leads strip 1/2"
F106636A0018-M	636A with (1) 10" white ('A' lead) #18 AWM 1015 topcoat lead strip 7/16" & (1) 6- 1/2" white ('B' lead) #18 AWM 1015 lead strip 3/16", less screws
F106636A0019-M	636A with (1) 5-1/2" white ('A' lead) #18 AWM 1015 topcoat lead strip 7/16" & (1) 14- 3/4" white ('B' lead) #18 AWM 1015 lead strip 3/16", less screws

Catalog Number Rated 660W - 600V	Catalog Number Rated 660W - 250V	Color	Mounting Methods
635A	635A-101	White	Snap spring, screws not necessary
635A-51	635A-151	White	Snap spring with disconnect, screws not necessary
636A	635A-101	White	4-36 tapped holes, screws optional

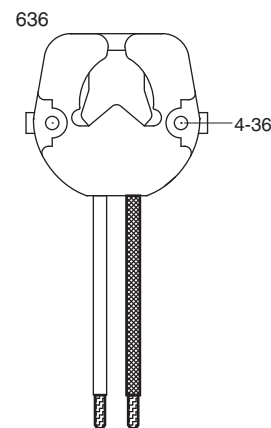

dimensional data for 635 & 636 Series

