

H2932T Closet


Light/Shallow Rectangle

60W A19 lamp. White trim with albalite diffuser. Equipped with junction box listed for through branch applications. Non-IC

Housing: 11 5/8" L x 3 1/2" D x 5 1/2" WW

Trim: 9 3/8" L x 5 3/4" H

Finish: White

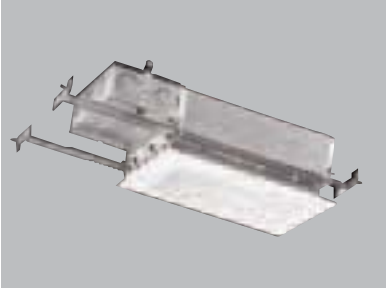

H37T-401AL Heat Light

250W Infra-Red 8" OD x 5 1/2" Height.

Brushed aluminum trim ring.
IP Rated



477 Power-Trac Adapter

Trim

Allows (120V) Trac Lampholders (150W max) to be used with recessed installations.

Use with H7T, H7ICT, H27T, H7RT, H7RICT, H27RT and H44T housings.

Finish: White with Black Baffle (477P), White with White Baffle (477W)

OD: 7 1/4"



Dichroic Color Filters

For low voltage MR16 units.

- L114** UV Filter
- L120** Red
- L121** Amber
- L122** Yellow
- L123** Green
- L124** Daylight
- L125** Blue
- L127** Cosmetic Color Filters
- L130** Yellow



GA-ATH5-6PK - 6-pack H5ICAT Air-Tite™ gaskets

GA-ATH7-6PK - 6-pack H7ICAT Air-Tite™ gaskets

A housing gasket is the final step in completing an air-tight, code-compliant installation. Halo and All-Pro make this final step simple by including an AirTite™ gasket in each housing to complete the final installation of the can opening. Should the gaskets be lost or discarded during the rough-in phase of installation these replacement kits are available.



Designer Finish

Trim Rings

Metal 7 1/4" OD. Compatible with 310*, 312*, 376, 378, 400, 404, 405, 406SC, 406RG, 409, 410, 416, 419, 420, 424, 425, 426*, 429*, 446, 448, 455CG, 455SC, 456P, 456W, 477, 478, 1412, 1416, 1475, 2412, 2416, 2475.

*Supplied with TRM6P white metal trim rings. All others are supplied with white plastic trim rings.

TRM6P	White Metal
TRM6SL	Silver Metal
TRM6PB	Polished Brass
TRM6C	Chrome
TRM6SN	Satin Nickel
TRM6AC	Antique Copper
TRM6TBZ	Tuscan Bronze
TRM6MB	Black Metal
TRP7MB	Black plastic

