



TUV T8

TUV 60-95W HO SLV/25

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Product data

General information		Operating and electrical	
Base	G13 [Medium Bi-Pin Fluorescent]	Power (Rated) (Nom)	60 W
Main Application	Reprography (R)	Lamp Current (Nom)	0.620 A
Life To 10% Failures (Nom)	7500 h	Voltage (Nom)	124 V
Useful Life (Nom)	8000 h		
System Description	High Output (HO)	Mechanical and housing	
		Cap-Base Information	2P
		Bulb Shape	T8 [T8]
Light technical		Approval and application	
Color Code	TUV	Mercury (Hg) Content (Nom)	8.0 mg
Color Designation	- [Not Specified]		
Depreciation at Useful Lifetime	15 %		


TUV T8

UV	
UV-C Radiation at 100 hr	22.5 W
Product data	
Order product name	TUV TL-D 95W HO SLV/25
EAN/UPC - Product	8711500893925
Order code	203117
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	928049804006
Net Weight (Piece)	233.000 g




Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV TL-D 95W HO SLV/25	28 mm	1500 mm	1507.1 mm	1504.7 mm	1514.2 mm

TUV TL-D 95W HO SLV/25

Photometric data

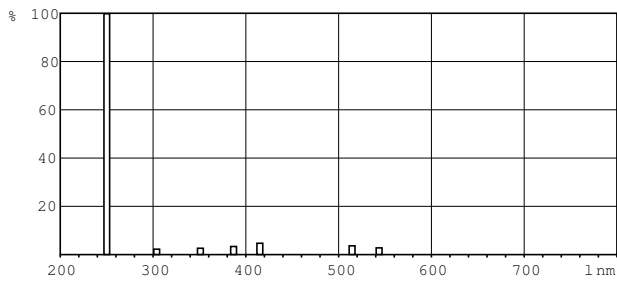

XDPB_XUTUVTLD-Spectral power distribution B/W

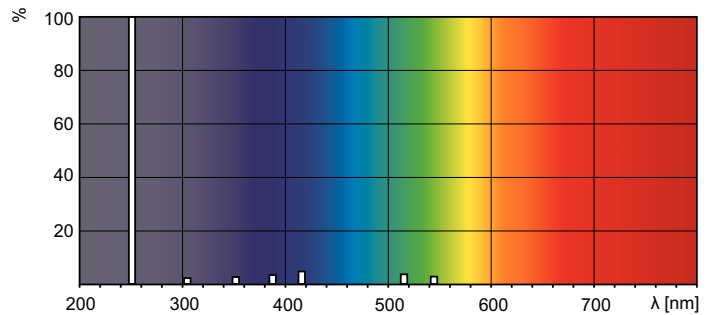

XDPO_XUTUVTLD-Spectral power distribution Colour

