



ProPoint® Outdoor Luminaires

LED Wall Pack





Dimensions

Cutoff Wall Pack



Non-Cutoff Wall Pack



Product Features

The Wall Pack luminaires improve outdoor illumination with significant energy and maintenance savings. Ideal in place of new and existing traditional luminaires, the Wall Pack series is offered in three levels of LED power for illuminating stairwells, canopies, outdoor walkways and corridors.

ProPoint luminaires assure optimum light engine performance for extended service and rated life (100,000 hours L_{70}). These environmentally preferable LED luminaires use up to 76% less energy than traditional lighting. The fixture is also IP66 rated so that a simple hose-down removes the dirt and grime that impedes illumination and jeopardizes pedestrian safety.

Catalog # _____

Type _____

Project _____

Notes _____

Date _____

Specifications

Weight: TWP: 15lbs. (6.8kg), NWP: 14lbs (6.4kg)

Construction: Luminaire is constructed of a one-piece cast, low-copper (<0.4%CU) aluminum alloy. It has a UV resistant powder coat paint, 2.5 mil nominal thickness. The standard color is bronze.

LED System: LED system with a life rating at 100,000 hours at L_{70} . Luminaire efficacy up to 92 LPW.

Electrical: Offered in 30, 50, and 85 Watts, the luminaire is designed to operate through the 120-277VAC universal voltage range or 347-480VAC high universal voltage range and includes lightning surge protection in each unit*, which is effective in suppressing most transient surges on the AC line. The 0-10V driver is control ready. The LED driver is a constant current device with high power factor correction to maximize power utilization. The driver meets UL1310 and UL48 Class 2 with built-in over temperature protection. The fixture power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Color Characteristics: CRI >70; CCT of 4000K

Optics: Type V cutoff uses flat tempered glass lens. Type IV non-cutoff uses a borosilicate glass refractor.

Installation: Luminaire mounts to recessed outlet box or can be surface mounted. Designed with a hanging bracket feature that allows the luminaire to be suspended during installation, which allows both hands to be free for wiring.

Operating Temperature: 30W UNV and HUV: -40°C to $+40^{\circ}\text{C}$; 50W HUV, 85W UNV and HUV: -40°C to $+30^{\circ}\text{C}$

Listings: IP66 Certified; UL1310; FCC and RoHS Certified and UL1598 Listed for wet locations in US and Canada, tested in accordance with IEEE C62.41-2002 Category C low (10kV, 5kA); DLC qualified for utility rebates.

Warranty: Standard OSRAM 5-year luminaire warranty (LED152).

Note: Specifications subject to change without notice. IES files available online.

* Surge protection not available at 480V.



Ordering Guide


Item Number: _____

TWP	L	XXX	7	40	C5	XXX	BZ
Product Name	Lamp Type	Wattage	CRI	Color Temp	Photometric Distribution	Voltage	Finish/ Color
TWP = Trapezoidal Wall Pack	L = LED	030 = 30 Watts	7 = 70+	40 = 4000K	C5 = Cutoff Type V	UNV = 120-277V	BZ = Bronze
NWP = Non-Cutoff Wall Pack		050 = 50 Watts			T4 = Non-Cutoff Type IV	HUV = 347-480V	
		085 = 85 Watts					




Photometric Data

ProPoint® Small Wall Pack: 50W, 4000K Type V
Maximum Candela = 1332.7

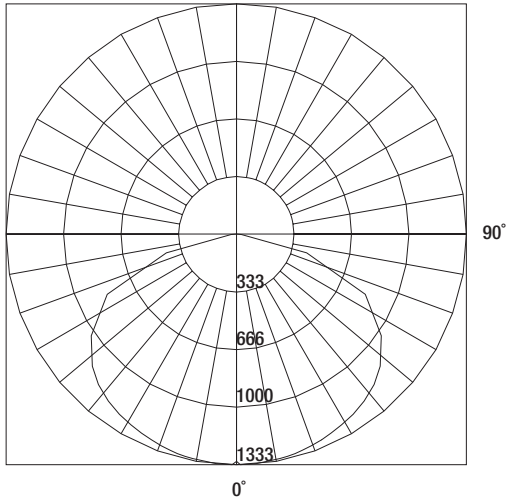


ProPoint® Wall Pack: 50W, 4000K Type IV Non-Cutoff (Prismatic Lens)
Maximum Candela = 1533.9 Located at Horizontal Angle = 5, Vertical Angle = 75
Vertical Plane Through Horizontal Angles (5-185) (Through Max. Cd.)

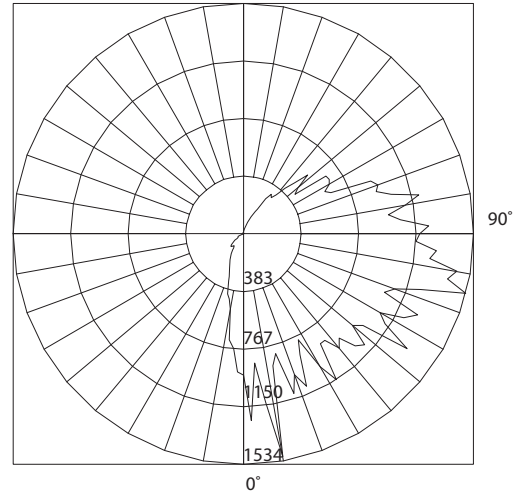


Additional Diagrams/Mounting Details/Performance Comparisons

Cutoff Wall Pack

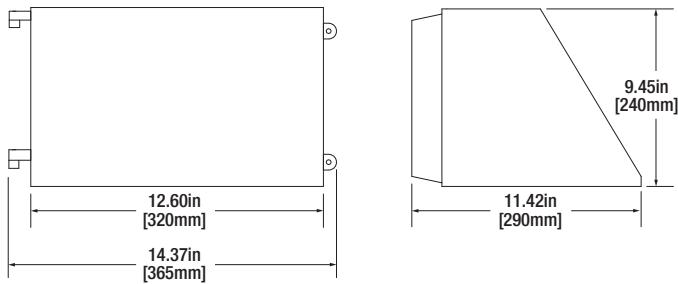

Non-Cutoff Wall Pack

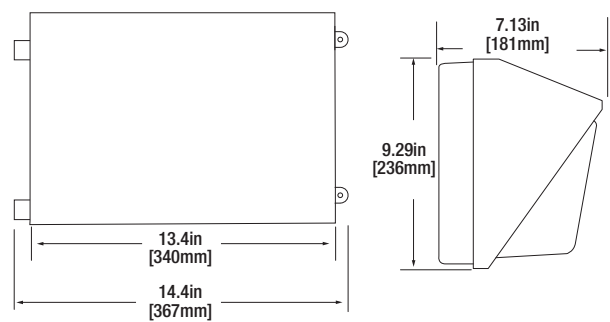

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	CRI	Color Temp (CCT)	Distribution	Voltage	Total Fixture Lumens	LPW
71082	TWP/L/030/740/C5/UNV/BZ	30	70+	4000K	Type V Cutoff	120-277V	2800	89
71083	TWP/L/050/740/C5/UNV/BZ	50	70+	4000K	Type V Cutoff	120-277V	4800	92
71086	TWP/L/050/740/C5/HUV/BZ	50	70+	4000K	Type V Cutoff	347-480V	4800	92
71084	TWP/L/085/740/C5/UNV/BZ	85	70+	4000K	Type V Cutoff	120-277V	7300	84
71087	TWP/L/085/740/C5/HUV/BZ	85	70+	4000K	Type V Cutoff	347-480V	7300	84
72903	NWP/L/030/740/T4/UNV/BZ	30	70+	4000K	Type IV Non-Cutoff	120-277V	2800	89
72904	NWP/L/050/740/T4/UNV/BZ	50	70+	4000K	Type IV Non-Cutoff	120-277V	4800	92
72907	NWP/L/050/740/T4/HUV/BZ	50	70+	4000K	Type IV Non-Cutoff	347-480V	4800	92
72905	NWP/L/085/740/T4/UNV/BZ	85	70+	4000K	Type IV Non-Cutoff	120-277V	7300	84
72908	NWP/L/085/740/T4/HUV/BZ	85	70+	4000K	Type IV Non-Cutoff	347-480V	7300	84

www.osram-america.com
1-800-LIGHTBULB

OSRAM is a registered trademark of OSRAM GmbH.
ProPoint is a registered trademark.
The DesignLights Consortium mark is a registered trademark of DesignLights Consortium.
Specifications subject to change without notice.

© 2014 OSRAM