

COILIGHT™ & MINI COILIGHT™ SERIES

- Energy Efficient
- Low Operating Temperature
- Long Lamp Life - 10,000 Hours Average Rated Life
- Integral Electronic Ballast
- Medium Screw Base
- Universal Burn Position

Please see Safety and
Handling Instructions
on pages 81 and 82.

Watts	Ushio Ordering Code	Ushio Lamp Code	Dimensions			Lumens lm	Approx Temp K	Color CRI	Avg Rated Life* h	Commercial Life** h	Case Qty
			Dia (In)	MOL (mm)	MOL (In)						
Mini Coilight™ Medium Screw Base – E26											
9	3000153	CF9CLT/E26	1.91	111.5	4.39	525	2700	85	10000	12500	50
11	3000154	CF11CLT/E26	1.91	125.7	4.95	600	2700	85	10000	12500	50
13	3000443	CF13CLT/E26	1.91	132.8	5.23	825	2700	85	10000	12500	50
Coilights™ Medium Screw Base – E26											
15	3000155	CF15CLT/E26	2.36	148	5.83	900	2700	85	10000	12500	10
20	3000156	CF20CLT/E26	2.36	158	6.22	1200	2700	85	10000	12500	10
23	3000157	CF23CLT/E26	2.36	167	6.57	1500	2700	85	10000	12500	10
26	3000444	CF26CLT/E26	2.36	173	6.81	1800	2700	85	10000	12500	10


All dimensions shown in inches unless otherwise noted.

* Based on ANSI / IESNA standards of 3 hours per start

** Based on estimated commercial operating standards of 12 hours per start

Coilights™ are not designed for dimming circuits or photocells.
Coilights™ are not to be used in fully enclosed fixtures without adequate ventilation.

USHIO Coilight™ Series Fluorescent	Incandescent "A" Line Equivalent
Mini Coilight™	
CF9CLT/E26; 9W	40W incandescent
CF11CLT/E26; 11W	60W incandescent
CF13CLT/E26; 13W	75W incandescent
Coilight™	
CF15CLT/E26; 15W	75W incandescent
CF20CLT/E26; 20W	100W incandescent
CF23CLT/E26; 23W	120W incandescent
CF26CLT/E26; 26W	150W incandescent

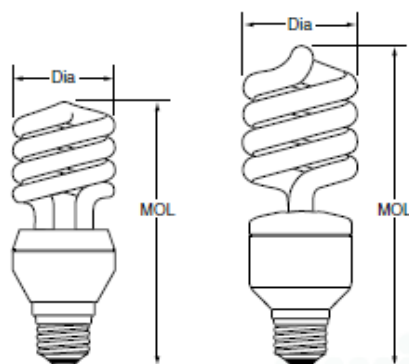

Hg - LAMP CONTAINS MERCURY
Manage in Accord with Disposal Laws
See: www.lamprecycle.org