

4


3

DWG NO. 3000208 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

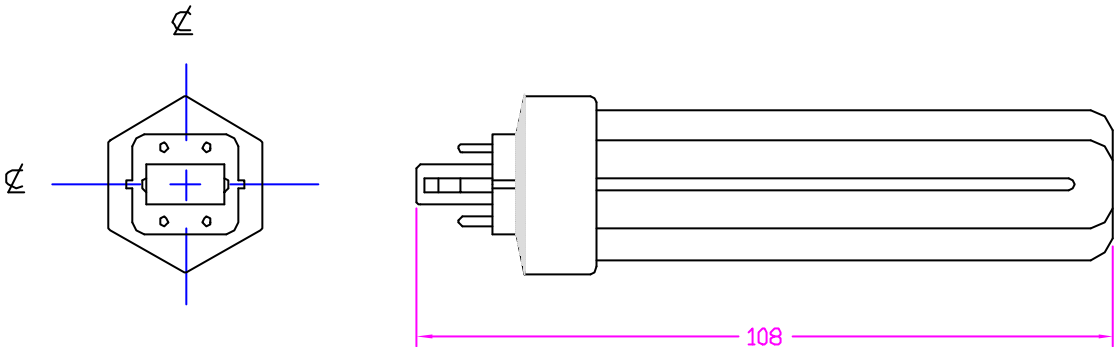

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	91 V
WATTAGE	13 W
CURRENT	0.175 A
COLOR TEMP	4000 K
CRI	82
LUMENS	900 Lm
ANSI SHAPE	T-4 TRIPPLE TUBE
BASE TYPE	CAP TYPE-GX24q-1
Ave. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630			
		APPROVALS				DATE	
		DRAWN	R.AMPARO	03/05/01	TITLE UFL-CF13TE/841 COMPACT FLUORESCENT		
		CHKD	K.CORDERO	03/05/01			
		ENGR					
		MFG					
		QUAL					
MATERIAL COMPOSITE		SIZE		CODE IDENT NO.	DWG NO.		
FINISH		DSGN ACTVY		B		3000208	
		GOVT ACTVY		SCALE		WEIGHT	SHEET
				NONE		1 OF 1	

4

3

2

1

CAD