


4

3

DWG NO. 3000155 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

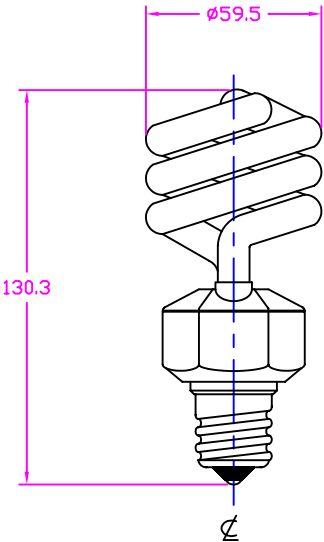

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	15 W
AMPERAGE	0.12 A
COLOR TEMP	2700 K
CRI	85
AVERAGE LIFE	10000 HRS

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630 TITLE UFL-CF15CLT/E26 COMPACT FLUORESCENT LAMP		
		APPROVALS				
		DRAWN R.AMPARO	04/25/00			
		CHKD D.GILCZYNSKI	04/25/00			
		ENGR				
MATERIAL COMPOSITE		MFG				
		QUAL		SIZE B	CODE IDENT NO.	DWG NO. 3000155
		DSGN ACTVY				
FINISH		GOVT ACTVY		SCALE NONE	WEIGHT	SHEET 1 OF 1