
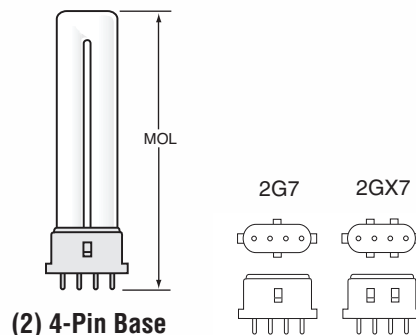


USHIO

CHARACTERISTICS & SPECIFICATIONS

SINGLE TUBE

Average Life: 10,000 hours • CRI: 82

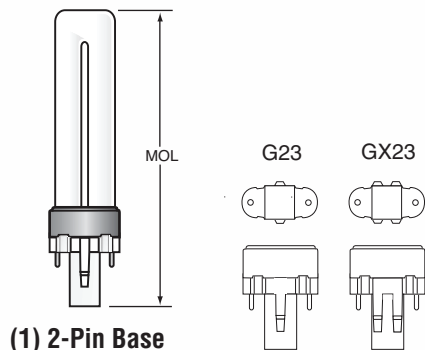

Watts (W)	Ushio Ordering Code	Ushio Lamp Description	Volts (V)	Current (A)	Luminous Flux		Color Temp (K)	Dimensions		Base
					Nom. (lm)	Min. (lm)		MOL (mm)	MOL (in)	
Single Tube 2-Pin Base (1)										
5	3000062	CF5S/827	35	0.180	250	230	2700	108	4.3	G23
5	3000163	CF5S/835	35	0.180	250	230	3500	108	4.3	G23
5	3000147	CF5S/841	35	0.180	250	230	4100	108	4.3	G23
5	3000164	CF5S/865	35	0.180	240	220	6500	108	4.3	G23
7	3000063	CF7S/827	45	0.180	400	360	2700	138	5.4	G23
7	3000061	CF7S/835	45	0.180	400	360	3500	138	5.4	G23
7	3000064	CF7S/841	45	0.180	400	360	4100	138	5.4	G23
7	3000165	CF7S/865	45	0.180	380	340	6500	138	5.4	G23
9	3000066	CF9S/827	59	0.180	600	540	2700	168	6.6	G23
9	3000060	CF9S/835	59	0.180	600	540	3500	168	6.6	G23
9	3000067	CF9S/841	59	0.180	600	540	4100	168	6.6	G23
9	3000166	CF9S/865	59	0.180	570	520	6500	168	6.6	G23
13	3000054	CF13S/827	59	0.285	800	720	2700	180	7.1	GX23
13	3000057	CF13S/835	59	0.285	800	720	3500	180	7.1	GX23
13	3000055	CF13S/841	59	0.285	800	720	4100	180	7.1	GX23
13	3000427	CF13S/850	59	0.285	800	720	5000	180	7.1	GX23
13	3000167	CF13S/865	59	0.285	760	690	6500	180	7.1	GX23
Single Tube 4-Pin Base for Electronic Ballasts (2)—Dimmable										
5	3000168	CF5SE/827	35	0.180	250	230	2700	85	3.4	2G7
5	3000173	CF5SE/835	35	0.180	250	230	3500	85	3.4	2G7
7	3000169	CF7SE/827	47	0.175	400	360	2700	115	4.5	2G7
7	3000175	CF7SE/841	47	0.175	400	360	4100	115	4.5	2G7
9	3000170	CF9SE/827	60	0.170	600	540	2700	145	5.7	2G7
9	3000179	CF9SE/835	60	0.170	600	540	3500	145	5.7	2G7
9	3000178	CF9SE/841	60	0.170	600	540	4100	145	5.7	2G7
13	3000171	CF13SE/827	59	0.285	800	720	2700	160	6.3	2GX7
13	3000251	CF13SE/830	59	0.285	800	720	3000	160	6.3	2GX7
13	3000182	CF13SE/835	59	0.285	800	720	3500	160	6.3	2GX7
13	3000181	CF13SE/841	59	0.285	800	720	4100	160	6.3	2GX7