
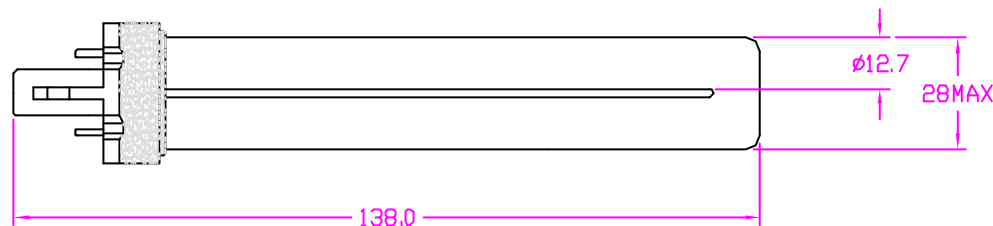


REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------



NOTE5:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	45 V
WATTAGE	7 W
CURRENT	0.180 A
COLOR TEMP	6500 K
CRI	B2
LUMENS	380 Lm
ANSI SHAPE	T-4 SINGLE TUBE
BASE TYPE	CAP TYPE-G23
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	03/07/01	TITLE UFL-CF7S/865 COMPACT FLUORESCENT	
		CHECKED	K.CORDERO	03/07/01		
		ENGR				
		MFG				
		MATERIAL		QUAL	SIZE	CODE IDENT NO.
COMPOSITE			B		3000165	
FINISH		DSGN ACTVY	SCALE	WEIGHT	SHEET	
		GOVT ACTVY	NONE		1 OF 1	