


USHIO



CHARACTERISTICS & SPECIFICATIONS

DOUBLE TUBE


Average Life: 10,000 hours • CRI: 82



(3) 2-Pin Base

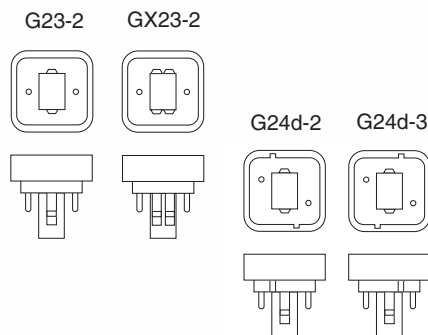

(4) 4-Pin Base



Watts (W)	Ushio Ordering Code	Ushio Lamp Description	Volts (V)	Current (A)	Luminous Flux		Color Temp (K)	Dimensions		Base
					Nom. (lm)	Min. (lm)		MOL (mm)	MOL (in)	
Double Tube 2-Pin Base (3)										
9	3000065	CF9D/827	59	0.180	525	475	2700	108	4.3	G23-2
9	3000139	CF9D/835	59	0.180	525	475	3500	108	4.3	G23-2
9	3000184	CF9D/841	59	0.180	525	475	4100	108	4.3	G23-2
9	3000185	CF9D/865	59	0.180	500	450	6500	108	4.3	G23-2
13	3000052	CF13D/827	59	0.285	780	700	2700	118	4.7	GX23-2
13	3000053	CF13D/835	59	0.285	780	700	3500	118	4.7	GX23-2
13	3000140	CF13D/841	59	0.285	780	700	4100	118	4.7	GX23-2
13	3000426	CF13D/850	59	0.285	780	700	5000	118	4.7	GX23-2
13	3000190	CF13D/865	59	0.285	740	670	6500	118	4.7	GX23-2
18	3000135	CF18D/827	100	0.220	1200	1080	2700	153	6.0	G24d-2
18	3000145	CF18D/835	100	0.220	1200	1080	3500	153	6.0	G24d-2
18	3000141	CF18D/841	100	0.220	1200	1080	4100	153	6.0	G24d-2
18	3000195	CF18D/865	100	0.220	1140	1030	6500	153	6.0	G24d-2
26	3000058	CF26D/827	105	0.325	1800	1620	2700	172	6.8	G24d-3
26	3000146	CF26D/835	105	0.325	1800	1620	3500	172	6.8	G24d-3
26	3000142	CF26D/841	105	0.325	1800	1620	4100	172	6.8	G24d-3
26	3000196	CF26D/865	105	0.325	1710	1540	6500	172	6.8	G24d-3
Double Tube 4-Pin Base for Electronic Ballasts (4)—Dimmable										
10	3000239	CF10DE/827	64	0.190	600	540	2700	103	4.1	G24q-1
10	3000240	CF10DE/835	64	0.190	600	540	3500	103	4.1	G24q-1
10	3000241	CF10DE/841	64	0.190	600	540	4100	103	4.1	G24q-1
13	3000159	CF13DE/827	91	0.175	900	810	2700	131	5.2	G24q-1
13	3000246	CF13DE/835	91	0.175	900	810	3500	131	5.2	G24q-1
13	3000160	CF13DE/841	91	0.175	900	810	4100	131	5.2	G24q-1
13	3000235	CF13DE/865	91	0.175	860	770	6500	131	5.2	G24q-1
18	3000056	CF18DE/827	100	0.220	1200	1080	2700	146	5.8	G24q-2
18	3000143	CF18DE/835	100	0.220	1200	1080	3500	146	5.8	G24q-2
18	3000136	CF18DE/841	100	0.220	1200	1080	4100	146	5.8	G24q-2
26	3000059	CF26DE/827	105	0.325	1800	1620	2700	165	6.5	G24q-3
26	3000144	CF26DE/835	105	0.325	1800	1620	2700	165	6.5	G24q-3
26	3000137	CF26DE/841	105	0.325	1800	1620	4100	165	6.5	G24q-3
26	3000238	CF26DE/865	105	0.325	1710	1540	6500	165	6.5	G24q-3