

4



3

DWG NO. 3000166 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

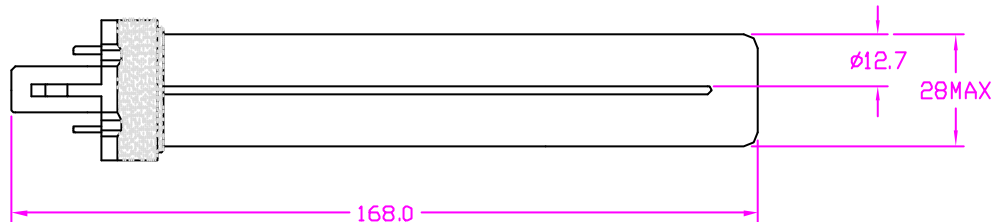

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	59 V
WATTAGE	9 W
CURRENT	0.180 A
COLOR TEMP	6500 K
CRI	82
LUMENS	570 Lm
ANSI SHAPE	T-4 SINGLE TUBE
BASE TYPE	CAP TYPE-G23
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD K.CORDERO		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC.		
			10550 Camden Dr. Cypress, CA 90630		
			UFL-CF9S/865		
			COMPACT FLUORESCENT		
			SIZE B	CODE IDENT NO.	DWG NO. 3000166
			SCALE NONE	WEIGHT	SHEET 1 OF 1

4

3

2

1

CAD