

4


3

DWG NO. 8000267 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

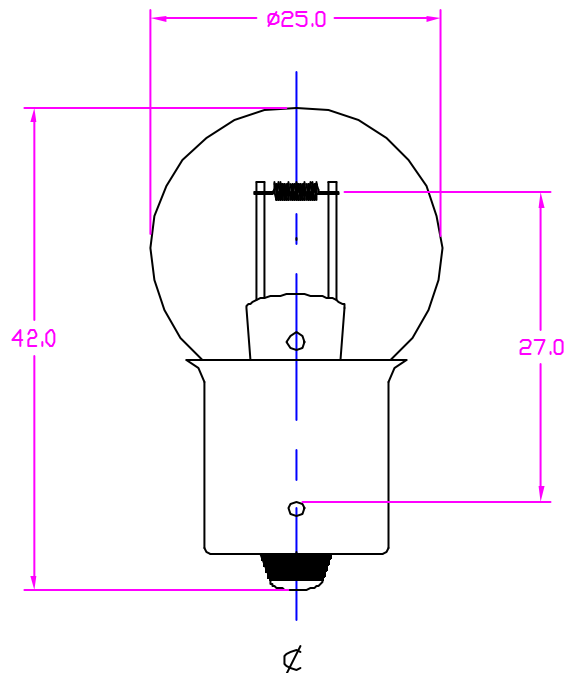

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	6 V
WATTAGE	10 W
BULB SHAPE	100 Lm
BULB SHAPE	G-8
BASE TYPE	BA15s
AVERAGE LIFE	600 HRS.
FILAMENT TYPE	C-B
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630	
		APPROVALS			
		DRAWN	R.AMPARO	07/21/99	TITLE SM-8014 INCANDESCENT LAMP
		CHKD	D.GILCZYNSKI	07/21/99	
		ENGR			
		MFG			
		QUAL			
MATERIAL		SIZE		CODE IDENT NO.	DWG NO.
COMPOSITE		B			8000266
FINISH		DSGN ACTVY		SCALE	
				NONE	
		GOVT ACTVY		WEIGHT	
				SHEET	
				1 OF 1	

4

3

2

1

CAD