

BALLAST SPECIFICATION


775W M181

Pulse Start Metal Halide

V90AM9610

60 Hz CWA C&C

Input Volts	120	208	240	277	480
Line Current (Amps)					
Operating	7.20	4.25	3.70	3.25	1.95
Open Circuit	8.05	4.75	3.95	3.55	2.15
Starting	2.80	1.85	1.75	1.45	.85
Recommended Fuse (Amps)	25	15	12	10	6
Regulation					
Line Volts	±10%	±10%	±10%	±10%	±10%
Lamp Watts	±10%	±10%	±10%	±10%	±10%
Temperature Ratings					
Insulation Class	180 (H)	180 (H)	180 (H)	180 (H)	180 (H)
Coil Temperature Code	B	A	A	B	D
Benchtop Coil Rise	77.1	72.3	73.0	78.0	85.9
Power Factor (%) HPF	90	90	90	90	90
Input Watts	848 W	848 W	848 W	848 W	848 W
Efficiency	91.3%	91.3%	91.3%	91.3%	91.3%
NOM. Open Circuit Voltage	430	430	430	430	430
Input Voltage At Lamp Dropout	75	125	145	170	285
Min Ambient Starting Temp	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V	2,000 V	2,000 V	2,000 V	2,000 V
1 Second	2,400 V	2,400 V	2,400 V	2,400 V	2,400 V
Open Circuit Voltage Test (V)	390 - 470	390 - 470	390 - 470	390 - 470	390 - 470
Short Circuit Current Test (A)					
Secondary Current	Min 4.30	4.30	4.30	4.30	4.30
Max 5.30	5.30	5.30	5.30	5.30	5.30
Input Current	Min 1.85	1.35	1.30	1.10	0.60
Max 2.75	2.00	1.95	1.65	1.00	1.00
CORE and COIL Specifications					
Dimension (A)	3.00 in	3.00 in	3.00 in	3.00 in	3.00 in
Dimension (B)	5.15 in	5.15 in	5.15 in	5.15 in	5.15 in
Weight	19.5 lb's	19.5 lb's	19.5 lb's	19.5 lb's	19.5 lb's
Lead Lengths	12 "	12 "	12 "	12 "	12 "
Capacitor Requirement					
Microfarads	22.0 uf	22.0 uf	22.0 uf	22.0 uf	22.0 uf
Volts (Min)	500 V	500 V	500 V	500 V	500 V

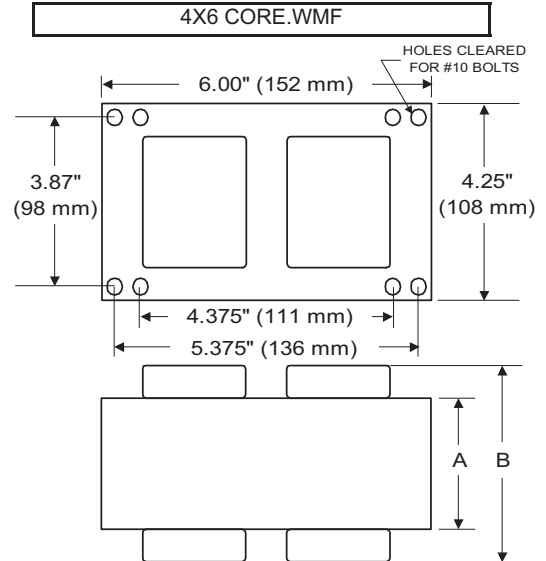



Capacitor:	ACB327OV	Ignitor:	BVS-020
Microfarads:	22.0 uf	Case Temp (Max):	105 °C
Volts (Max):	525 V	BTL Distance (Max)	10 ft

Case Temp (Max) 100 °C

Height (Max): 4.03 in

Dia (Max): 1.97 in

Oval Width (Max): 2.97 in

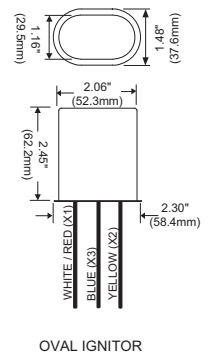

Ordering Information Add Suffix for options

C - With Oil-Filled Capacitor

CB - With Oil-Filled Capacitor and Welded Bracket

B - With Welded Bracket, no Capacitor

K - Prewired, with Oil-Filled Capacitor and Bracket Kit


* -40°F/-40°C Min Ambient Starting Temp with Venture Lamp

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

4/8/2014

Production

Coil material: primary Cu and secondary Al

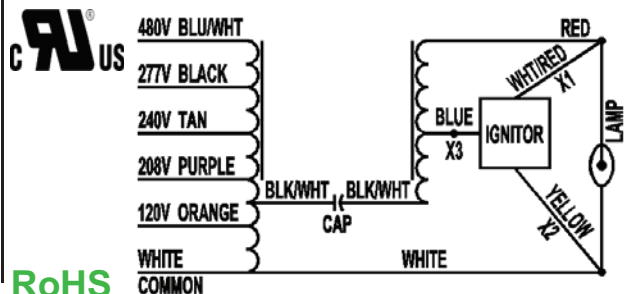

RoHS