





BALLAST SPECIFICATION

200W M136
Pulse Start Metal Halide
V90D7312
60 Hz CWA C&C

Input Volts	120	208	240	277
Line Current (Amps)				
Operating	1.90	1.10	0.95	0.85
Open Circuit	1.25	0.70	0.60	0.50
Starting	1.25	0.70	0.60	0.50
Recommended Fuse (Amps)	5	3	3	3
Regulation				
Line Volts	±10%	±10%	±10%	±10%
Lamp Watts	±9%	±9%	±9%	±9%
Temperature Ratings				
Insulation Class	180 (H)	180 (H)	180 (H)	180 (H)
Coil Temperature Code	A	A	A	A
Benchtop Coil Rise	59.9	60.7	59.1	50.9
Power Factor (%) HPF	90	90	90	90
Input Watts	227 W	227 W	227 W	227 W
Efficiency	88.0%	88.0%	88.0%	88.0%
NOM. Open Circuit Voltage	250	250	250	250
Input Voltage At Lamp Dropout	90	156	180	208
Min Ambient Starting Temp	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*	-20°F/-30°C*
60 HZ TEST PROCEDURES				
High Potential Test (Volts)				
1 Minute	1,600 V	1,600 V	1,600 V	1,600 V
1 Second	1,900 V	1,900 V	1,900 V	1,900 V
Open Circuit Voltage Test (V)	225 - 275	225 - 275	225 - 275	225 - 275
Short Circuit Current Test (A)				
Secondary Current				
Min	1.95	1.95	1.95	1.95
Max	2.40	2.40	2.40	2.40
Input Current				
Min	0.90	0.55	0.45	0.40
Max	1.40	0.80	0.70	0.60
CORE and COIL Specifications				
Dimension (A)	2.50 in	2.50 in	2.50 in	2.50 in
Dimension (B)	3.90 in	3.90 in	3.90 in	3.90 in
Weight	8.0 lb's	8.0 lb's	8.0 lb's	8.0 lb's
Lead Lengths	12 "	12 "	12 "	12 "
Capacitor Requirement				
Microfarads	15.0 uf	15.0 uf	15.0 uf	15.0 uf
Volts (Min)	330 V	330 V	330 V	330 V

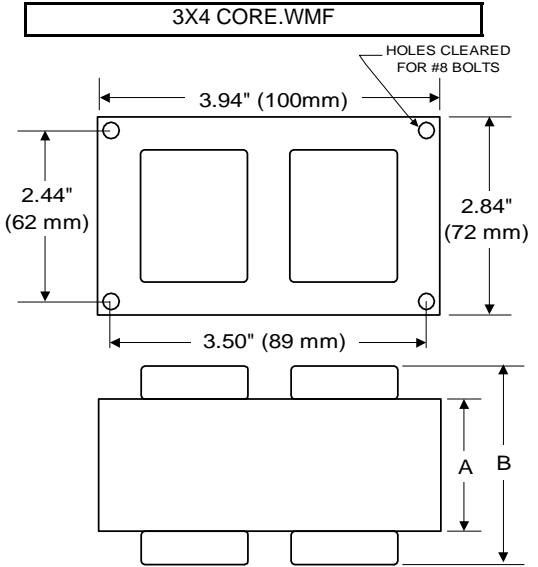

Capacitor:	ACG329	Ignitor:	BVS-041
Microfarads:	15.0 uf	Case Temp (Max):	105 °C
Volts (Max):	330 V	BTL Distance (Max)	2 ft
Case Temp (Max)	100 °C		
Height (Max):	2.80 in		
Dia (Max):	1.60 in		
Oval Width (Max):			

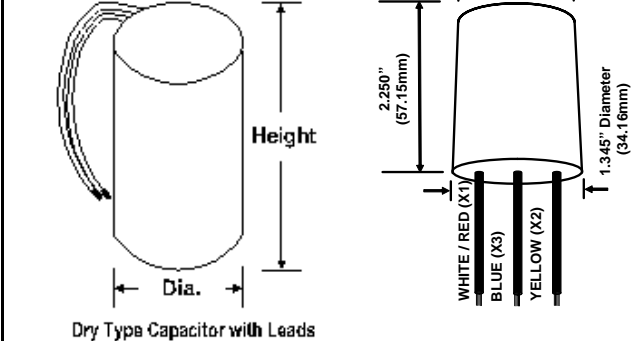


Ordering Information Add Suffix for options
 C - With Dry Capacitor
 CB - With Dry Capacitor and Welded Bracket
 B - With Welded Bracket, no Capacitor
 K - Prewired, with Dry Capacitor and Bracket Kit

* -40°F/-40°C Min Ambient Starting Temp with Venture Lamp

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

1/14/2009 **Production** Coil material: primary Cu and secondary Cu

Complies with the Energy Independence and Security Act of 2007 and California Title 20 Appliance Efficiency Regulations

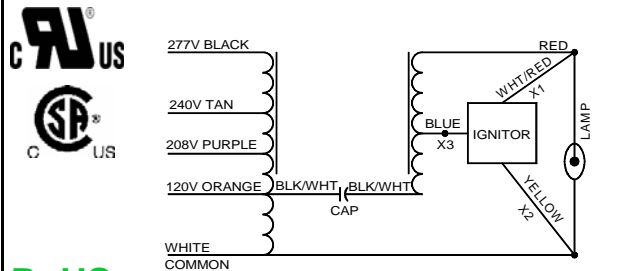

RoHS