


50W S68
High Pressure Sodium
V90E1131
60 Hz HX-HPF

Available at www.GoodMart.com 877-402-6100


Input Volts	120	240
Line Current (Amps)		
Operating	0.70	0.35
Open Circuit	0.60	0.30
Starting	1.20	0.60
Regulation		
Line Volts	±5%	±5%
Lamp Watts	±10%	±10%
UL Temperature Ratings		
Insulation Class	H	H
Coil Temperature Code	F	F
Benchtop Coil Rise		
Input Watts	76 W	76 W
NOM. Open Circuit Voltage	130	130
Power Factor	90%	90%
Current Crest Factor	1.50	1.50
Input Voltage At Lamp Dropout	85	170
MIN. Ambient Starting Temp.	-40°F -40°C	-40°F -40°C
60 HZ TEST PROCEDURES		
High Potential Test (Volts)		
1 Minute	2,000 V	2,000 V
1 Second	2,500 V	2,500 V
Open Circuit Voltage Test (V)	115 - 145	115 - 145
Short Circuit Current Test (A)		
Secondary Current Min	1.40	1.40
Max	1.75	1.75
Input Current Min	0.50	0.25
Max	0.70	0.35
Recommended Fuse (Amps)	2	1
CORE and COIL Specifications		
Dimension (A)	.80 in	.80 in
Dimension (B)	2.00 in	2.00 in
Weight (lbs.)	4.0 lb's	4.0 lb's
Lead Lengths	12 "	12 "
CAPACITOR Specifications		
Microfarads	6.0 uf	6.0 uf
Volts (min.)	330 V	330 V

3X4 CORE - HX, CWA & CWI UNITS

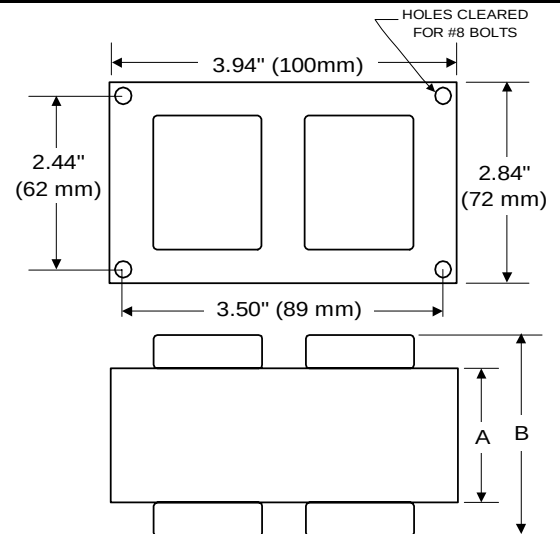

Capacitor: ACG033 Ignitor: BVS-006-A

Value: 6.0 uf Temp: 105 °C
Temp Rating 100 °C BTL: 12 ft
Height: 2.72 in
Dia/Oval Dim 1.38 in

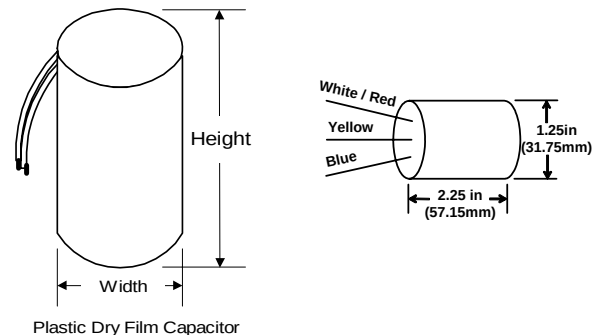

Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

