

BALLAST SPECIFICATION


70W M98

Pulse Start Metal Halide


V90H5832

60 Hz HX-HPF

Input Volts	120	277
Line Current (Amps)		
Operating	0.80	0.35
Open Circuit	1.70	0.70
Starting	0.70	0.30
Recommended Fuse (Amps)	4	2
Regulation		
Line Volts	±5%	±5%
Lamp Watts	±9%	±9%
Temperature Ratings		
Insulation Class	180 (H)	180 (H)
Coil Temperature Code	A	A
Benchtop Coil Rise	49.8	52.3
Power Factor (Min)	90%	90%
Input Watts	90 W	90 W
Efficiency	78%	78%
NOM. Open Circuit Voltage	255	255
Input Voltage At Lamp Dropout	85	195
Min Ambient Starting Temp	-20°F/-30°C*	-20°F/-30°C*
60 HZ TEST PROCEDURES		
High Potential Test (Volts)		
1 Minute	2,000 V	2,000 V
1 Second	2,500 V	2,500 V
Open Circuit Voltage Test (V)	230 - 280	230 - 280
Short Circuit Current Test (A)		
Secondary Current	Min 1.00	1.00
Max 1.25	1.25	1.25
Input Current	Min 0.55	0.25
Max 1.10	1.10	0.50
CORE and COIL Specifications		
Dimension (A)	1.45 in	1.45 in
Dimension (B)	2.85 in	2.85 in
Weight	4.9 lb's	4.9 lb's
Lead Lengths	12 "	12 "
Capacitor Requirement		
Microfarads	8.0 uf	8.0 uf
Volts (Min)	280 V	280 V

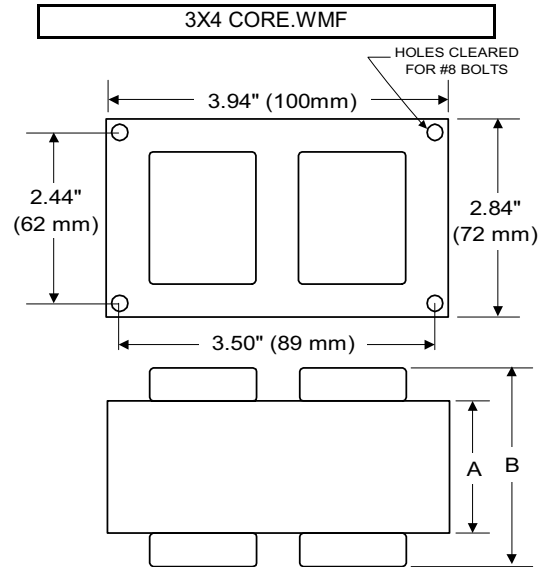

Capacitor:	ACG310	Ignitor:	BVS-032
Microfarads:	8.0 uf	Case Temp (Max):	105 °C
Volts (Max):	280 V	BTL Distance (Max):	2 ft
Case Temp (Max):	100 °C		
Height (Max):	2.76 in		
Dia (Max):	1.21 in		

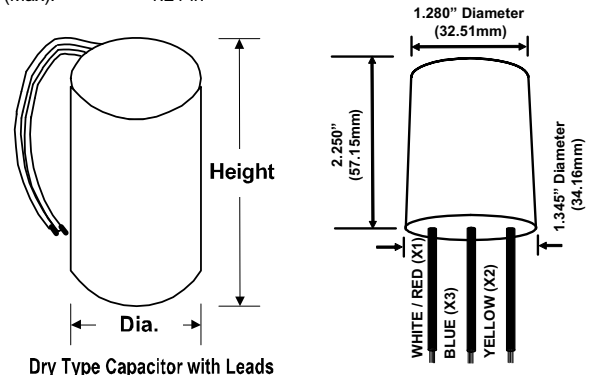

Ordering Information Add Suffix for options

- C - With Capacitor
- K - Prewired, with Capacitor and Bracket Kit
- B - With Welded Bracket, no cap
- CB - With Capacitor and Welded Bracket

* -40°F/-40°C Min Ambient Starting Temp with Venture Lamp
Coil material: primary Cu and secondary Cu

RoHS compliant on all manufactured products after August 1, 2007

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

11/24/2008 Production

CU US

SP

RoHS

