



VEL12040120H-1	
Family	ULTRON
Driver Type	Electronic
Input Voltage	120V
Input Frequency	50/60 Hz

PRODUCT SPECIFICATIONS


LED DRIVER

Model No.	Input Current at 120V (A)	Max. Output Power (W)	Output Voltage Range (V)	Output Current (mA)	Power Factor	Min. Starting Temp	IP Rating	Safety
VEL12040120H-1	0.13	12	16-30	400	> 0.90	-25°C/-13°F	20	UL


Performance

- Flying leads for rapid connection
- For Damp Location
- Inherent Thermal protection
- Meets FCC/IC Requirements
- UL Class 2
- Constant Current Output
- Non-dimmable

Wiring Diagram

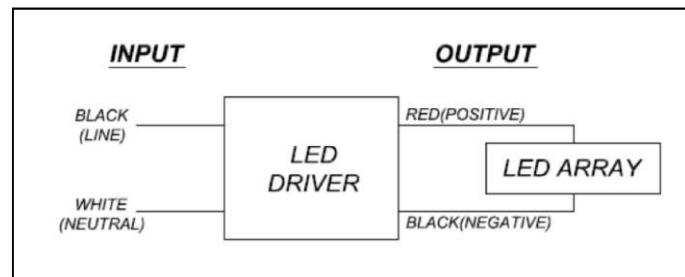

Physical Parameters

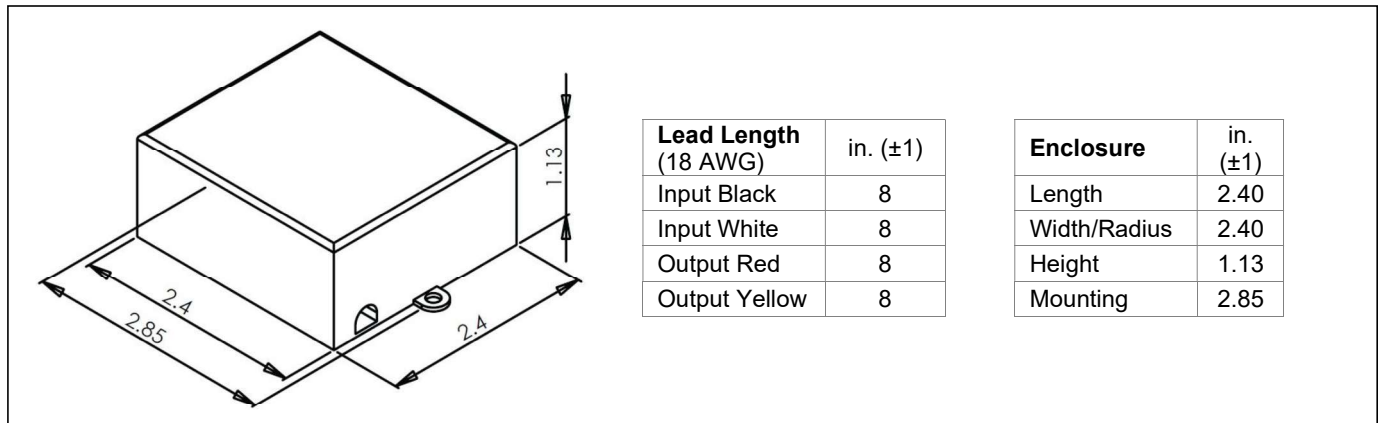

ORDERING INFORMATION: **VEL30105120H-1**

VEL	30	105	120	H	-	1
Manufacturer's Code	Max Wattage 30 = 30W	Output Current 105 = 1050mA (1050mA – 1750mA)*	Input Voltage 120 = 120V	Power Factor H = High		Case Type 1 = Case 1
* Customer can specify output current between 1050mA – 1750mA						

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.



ESPEN Technology, Inc.
 12257 Florence Avenue • Santa Fe Springs, CA 90670
 Phone: (562) 529-2938 • Fax: (562) 529-2978 • Toll Free: (866) 933-7736
 Email: info@espentech.com • www.espentech.com