



VEV8024MVHDA-10V-24	
Family	ULTRON
Driver Type	Constant Voltage
Dimming	0-10V
Input Voltage	100-277V
Input Frequency	50/60 Hz

PRODUCT SPECIFICATIONS


LED DRIVER

Model No.	Max. Output Power (W)	Output Voltage Range (V)	Output Current (mA)	Input Current at 120V (A)	Power Factor	Min. Starting Temp.	IP Rating	Safety
VEV8024MVHDA-10V-24	80	23.0 – 25.5	3300	0.80	0.90	-30°F/-34°C	IP54	UL, cUL, CE

Performance

- Dimming Range: 0-100%
- Life Rating: 50,000 hours @ Ta = 40°C
- Flying leads for rapid connection
- For Dry or Damp Location
- Meets FCC Requirements
- UL Class 2

Wiring Diagram

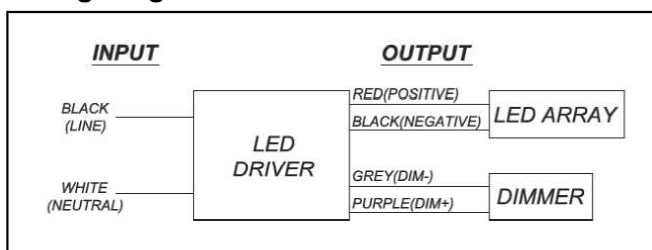

Physical Parameters

Case 24		Lead Length (18 AWG)	in. (±1)
		Input Black/White	11.8
		Output Red/Blue	11.8
		Control Gray/Purple	11.8
		Enclosure	in. (±1)
		Length (L)	9.50
		Width (W)	1.70
		Height (H)	1.18
		Mounting (M)	9.00
		Radius (R)	0.25

ORDERING INFORMATION: VEV8024MVHDA-10V-24

VEV	80	24	MV	H	D	A	-	10V	-	24
Manufacturer's Code	Max Wattage 60 = 60W	Output Voltage 24 = 24V	Input Voltage MV = 100-277V	Power Factor H = High	Dimming D = Dimming	UL Class 2 A = Class 2		Dimming Type 10V = 0-10V Dimming		Case Type 24 = Case 24

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

