


Electrical Specifications

VH-2Q18-TP-W

Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Discontinued

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFM18W/GX24D	2	18	50/10	0.15	0.28	0.00	40	0.96	25	0.97
CFQ18W/G24D	2	18	50/10	0.15	0.28	0.00	42	0.93	15	1.00

Wiring Diagram

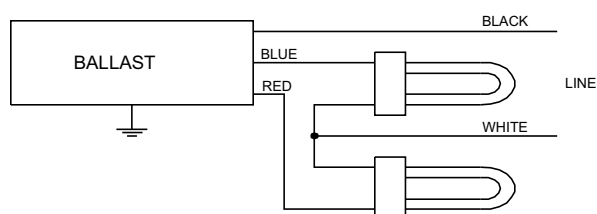


Diag. 51

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	15	38.1	Yellow/Blue		0
White		0	Blue/White		0
Blue	15	38.1	Brown		0
Red	15	38.1	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

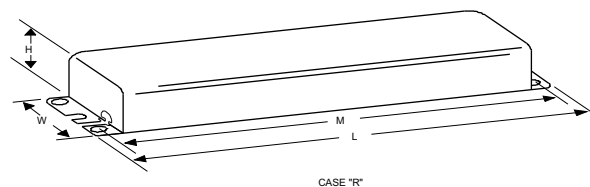

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
9.50 "	2.375 "	1.6875 "	8.90625 "
9 1/2	2 3/8	1 11/16	8 29/32
24.1 cm	6 cm / 0 cm	4.3 cm	22.6 cm

Revised 10/26/2011



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.