

SYLVANIA

LEDVANCE Luminaires

Volumetric Troffer



Product Features

The Volumetric Troffers are environmentally preferable LED alternatives to traditional fluorescent luminaires, offering up to 55% in energy savings. They are offered in two sizes and are ideal for illuminating offices, retail and hospitality areas.

The volumetric design improves vertical illuminance while minimizing glare. LEDVANCE luminaires assure optimum light engine performance for extended service life and rated life (1A: $\geq 100,000$ hours L_{70} , 2A: $\geq 70,000$ hours L_{70}).

Wattage Comparison Chart

	Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
2x2	3x17W T8	48	35	27%
	2xU31W T8	56	35	38%
	3x17W T8	48	25*	48%
	2xU31W T8	56	25*	55%
2x4	3x28W T8	58	42	28%
	3x32W T8	75	42	44%
	3x28W T8	58	35*	39%
	3x32W T8	75	35*	53%

* Volume2A Version

Ordering Guide

Item Number:


VOLUME	XX	/	XXX	UNV	D	8	XX	/	XX	G	/	WH	/	X
Product Name	Generation		Wattage (1A)*	Voltage	Dimming	CRI	CCT		Dimension	Mounting		Color/Finish		Option
VOLUME	1A		035 = 35 Watts 042 = 42 Watts	UNV = 120-277V	D = 0-10V	8 = >80	35 = 3500K 40 = 4000K		22 = 2x2 24 = 2x4	G = Grid		WH = White		Blank = No Option E = Emergency
	2A		Wattage (2A)** 025 = 25 Watts 035 = 35 Watts											

*35W only available in 2x2 size, 42W only available in 2x4 size

**25W only available in 2x2 size, 35W only available in 2x4 size

Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

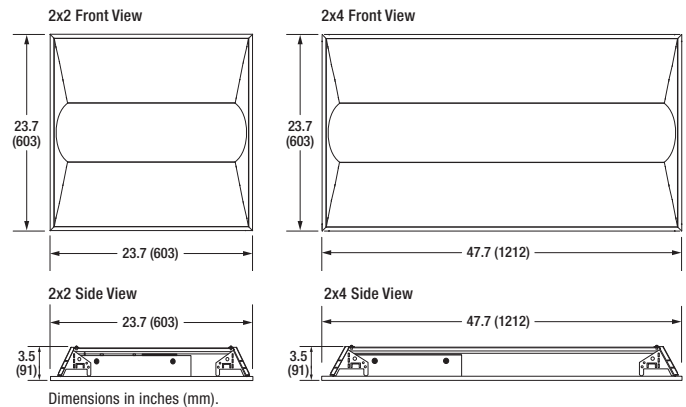

Specifications

Weight: 2x2: 8.3lbs (3.8kg) Standard 2x4: 13.4lbs (6.1kg) Standard
2x2: 10.5lbs (4.8kg) Emergency 2x4: 15.6lbs (7.1kg) Emergency

Construction: Post painted sheet metal with UV stabilized polycarbonate diffuse curved lens. The standard color is white.

LED System: LED system with a life rating of $\geq 100,000$ hours (1A) and $\geq 70,000$ hours (2A) at L_{70} @ 25°C. Luminaire efficacy up to 113 LPW.

Electrical: Offered in 25, 35 and 42 watts, the luminaire is designed to operate through the 120-277 Vac universal voltage range. The LED driver is a constant current device. The power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Dimming: The driver is 0-10V dimmable (down to 10%). Please reference the dimmer compatibility document (LEDLUM012).

Color Characteristics: CRI > 80; CCT of 3500K or 4000K.

Optics: Single white diffuse polycarbonate curved lens.

Installation: Luminaire is recessed in T-Grid ceilings.

Operating Temperature: -13°F to +104°F (-25°C to +40°C); EM: +32°F to +104°F (0°C to +40°C).

Listings: cETLus classified to UL1598C standards and Non-IC rated for wet locations (covered ceiling mount only).

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specification subject to change without notice. IES files available online.



*DLC Premium only applicable on 2A versions.



Photometric Data

Average Initial Illuminance (FC) at 30" AFF and avg/min uniformity 80/50/20 Reflectances.
Calculations are based on 110ft x 50ft area.

			8 ft Mounting Height			10 ft Mounting Height			12 ft Mounting Height		
			On Center Fixture Spacing			On Center Fixture Spacing			On Center Fixture Spacing		
			8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'	8'x10'	10'x10'	10'x12'
2'x2'	25W	VOLUME2A/025UNVD835/22G/WH (MTO)	41.5/1.48	34.2/1.29	30.3/1.51	40.2/1.55	33.3/1.40	29.2/1.32	38.6/1.60	32.1/1.48	28.1/1.26
		VOLUME2A/025UNVD840/22G/WH (MTO)	42.0/1.48	34.6/1.29	30.7/1.52	40.8/1.55	33.8/1.40	29.6/1.32	39.2/1.60	32.5/1.49	28.5/1.26
	35W	VOLUME1A/035UNVD835/22G/WH	42.5/1.46	35.2/1.29	31.2/1.64	41.1/1.52	34.1/1.40	29.9/1.35	39.4/1.58	32.7/1.47	28.6/1.30
		VOLUME1A/035UNVD840/22G/WH	42.9/1.46	35.4/1.30	31.4/1.59	41.4/1.53	34.4/1.40	30.1/1.33	39.7/1.57	32.9/1.48	28.8/1.24
2'x4'	35W	VOLUME2A/035UNVD835/24G/WH (MTO)	57.1/1.47	47.3/1.29	42.0/1.51	55.5/1.54	46.1/1.40	40.5/1.32	53.2/1.59	44.3/1.48	38.9/1.26
		VOLUME2A/035UNVD840/24G/WH (MTO)	58.0/1.47	48.1/1.29	42.7/1.51	56.4/1.54	46.9/1.40	41.1/1.31	54.1/1.60	45.0/1.48	39.5/1.26
	42W	VOLUME1A/042UNVD835/24G/WH	54.0/1.48	44.8/1.31	39.6/1.45	52.3/1.55	43.5/1.41	38.2/1.30	50.2/1.60	41.7/1.49	36.6/1.26
		VOLUME1A/042UNVD840/24G/WH	58.3/1.48	48.3/1.30	42.7/1.45	56.5/1.55	46.9/1.41	41.2/1.29	54.1/1.59	45.0/1.48	39.5/1.25

*Table also applicable to emergency versions.

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	Dimming	CRI	Color Temp (CCT)	Size	Total Fixture Lumens	LPW*	DLC	Options
74352	VOLUME1A/035UNVD835/22G/WH	35	120-277V	0-10V	>80	3500K	2x2	3500	107	Std	—
74353	VOLUME1A/035UNVD840/22G/WH	35	120-277V	0-10V	>80	4000K	2x2	3600	113	Std	—
74441	VOLUME1A/042UNVD835/24G/WH	42	120-277V	0-10V	>80	3500K	2x4	4400	103	Std	—
74442	VOLUME1A/042UNVD840/24G/WH	42	120-277V	0-10V	>80	4000K	2x4	4400	103	Std	—
74354	VOLUME1A/035UNVD835/22G/WH/E	35	120-277V	0-10V	>80	3500K	2x2	3500	107	Std	Emergency Battery Backup
74355	VOLUME1A/035UNVD840/22G/WH/E	35	120-277V	0-10V	>80	4000K	2x2	3600	113	Std	Emergency Battery Backup
74443	VOLUME1A/042UNVD835/24G/WH/E	42	120-277V	0-10V	>80	3500K	2x4	4400	103	Std	Emergency Battery Backup
74444	VOLUME1A/042UNVD840/24G/WH/E	42	120-277V	0-10V	>80	4000K	2x4	4400	103	Std	Emergency Battery Backup
71725	VOLUME2A/025UNVD835/22G/WH (MTO)	25	120-277V	0-10V	>80	3500K	2x2	3200	134	Premium	—
71726	VOLUME2A/025UNVD840/22G/WH (MTO)	25	120-277V	0-10V	>80	4000K	2x2	3300	136	Premium	—
74309	VOLUME2A/035UNVD835/24G/WH (MTO)	35	120-277V	0-10V	>80	3500K	2x4	4600	135	Premium	—
74348	VOLUME2A/035UNVD840/24G/WH (MTO)	35	120-277V	0-10V	>80	4000K	2x4	4600	138	Premium	—
71727	VOLUME2A/025UNVD835/22G/WH/E (MTO)	25	120-277V	0-10V	>80	3500K	2x2	3200	134	Premium	Emergency Battery Backup
71728	VOLUME2A/025UNVD840/22G/WH/E (MTO)	25	120-277V	0-10V	>80	4000K	2x2	3300	136	Premium	Emergency Battery Backup
74349	VOLUME2A/035UNVD835/24G/WH/E (MTO)	35	120-277V	0-10V	>80	3500K	2x4	4600	135	Premium	Emergency Battery Backup
74356	VOLUME2A/035UNVD840/24G/WH/E (MTO)	35	120-277V	0-10V	>80	4000K	2x4	4600	138	Premium	Emergency Battery Backup

*LPW per LM79 report.

**Pm for DLC Premium, Std for DLC Standard.

For further information and to learn more about utility rebates, contact your local SYLVANIA sales representative.

Options Information

Emergency Battery Backup:

Activates when normal power supply to the fixture fails, providing a minimum of 650 lumens (700 nominal lumens) for at least 90 minutes.

LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

 /sylvania  /sylvania

