

Flush-mount Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

Nominal rating: 660W/600V

Degree of protection: IP20

Max. permissible temperature at the rear side of the lampholder: T_m 110°C

All products in this chapter carry a T rating of T130 acc. to IEC standards

All lampholders with Push-In terminals: 18AWG solid or stranded solder-dipped

Flush-mount lampholder for T8 lamps

Lamp axis: 17mm (0.669")

Casing: PC, white, rotor: PBT GF


Push-In terminals: 18AWG

Mounting foot with slot for self-tapping #6 screw

Weight: 5.4g, packing qty.: 1000 pcs.

Type: 27356

Ref. No.: 100551



Flush-mount lampholder for T8 and T12 lamps

Lamp axis: 25.5mm (1.004")

Casing: PC, white, rotor: PBT GF


Push-In twin terminals: 18AWG

Mounting hole 3.8mm (0.150") dia.

Weight: 7g, packing qty.: 500 pcs.

Type: 27722

Ref. No.: 100572



Flush-mount lampholder for T8 and T12 lamps

With starter attachment

Lamp axis: 25.5mm (1.004")

Casing: PC, white, rotor: PBT GF


Push-In twin terminals: 18AWG

Mounting hole 3.8mm (0.150") dia.

Weight: 9g, packing qty.: 500 pcs.

Type: 27822

Ref. No.: 100583

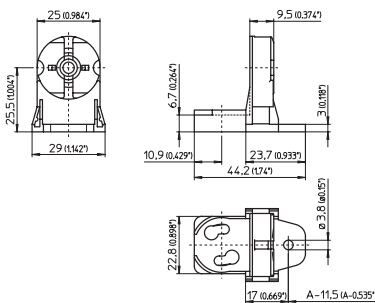

Flush-mount lampholders for T8 and T12 lamps

Casing: PBT GF, white, locking mechanism

Double edge wipe contacts

Terminals: bushings with set screws 18-14AWG solid

Zinc-coated polished steel bracket with slots

Weight: 35/38g, packing qty.: 500 pcs.

Type: 46102/46103

Ref. No.: 101651

Ref. No.: 101655 with spring adjustment

