

# G13 Push-through Lampholders

## For fluorescent lamps T8 (T26), T12 (T38)

Pin support for reliable contact

Lampholders with integrated starter holder have push-in twin terminals for the lamp circuit and push-in terminals for the starter circuit.

Max. permitted temperature  $T_m$  on the rear side of the lampholder: 110 °C

G13 push-through lampholders for lamps T8 and T12

Lamp axis: 23 mm

Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500

Push-in terminals: 0.5–1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4–2 mm

Weight: 6 g, unit: 1000 pcs.

Type: 27700/27701

**Ref. No.: 109330** with stop

**Ref. No.: 109331** without stop

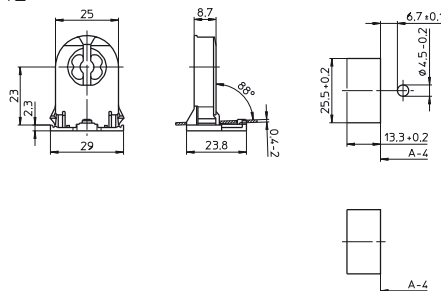

G13 push-through lampholders for lamps T8

With starter attachment

Lamp axis: 23 mm

Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500

Push-in terminals: 0.5–1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4–2 mm

Weight: 10.4 g, unit: 500 pcs.

Type: 27800/27801

**Ref. No.: 109332** with stop

**Ref. No.: 109335** without stop

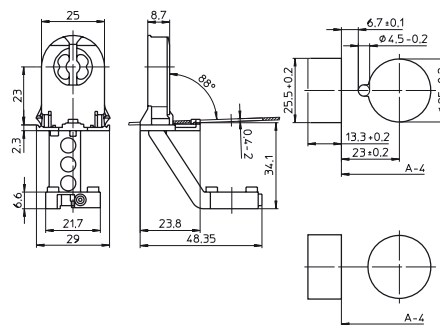

G13 push-through lampholders for lamps T8

Lamp axis: 16 mm

Casing: PC, white, frontplate: PBT GF, white T140, nominal rating: 2/500

Push-in terminals: 0.5–1 mm<sup>2</sup>


Lateral fixing clips for wall thickness 0.4–2 mm

Weight: 4.6/4.4 g, unit: 1000 pcs.

Type: 29300/29301

**Ref. No.: 509134** with stop

**Ref. No.: 509135** without stop

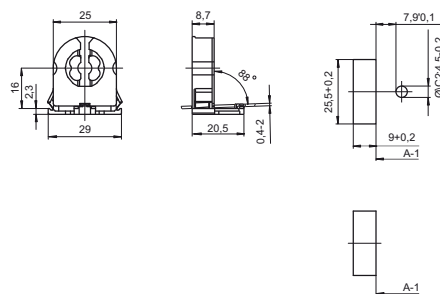

G13 push-through lampholders for lamps T8 and T12

Lamp axis: 22.5 mm

Casing: PC, white, rotor: PBT GF, white

T130, nominal rating: 2/500

Push-in terminals: 0.5–1 mm<sup>2</sup>

Lateral fixing clips for wall thickness 0.6–2 mm

Weight: 7.5/7.4 g, unit: 500 pcs.

Type: 27700/27701

**Ref. No.: 100562** with stop

**Ref. No.: 100564** without stop

