

RX7s lampholder

Casing: PPS, black, T220

Contact pin: Cu, silver bulb

Nominal rating: 2/250/5 kV

Leads: Cu tinned, stranded conductors 1 mm²,

Si-insulation max. Ø 3.6 mm, length: 200 mm


Oblong holes for screws M4

Central hole for screw M5

Weight: 46.7 g, unit: 200 pcs.

Type: 34330 contact distance 132 mm

Ref. No.: 528462

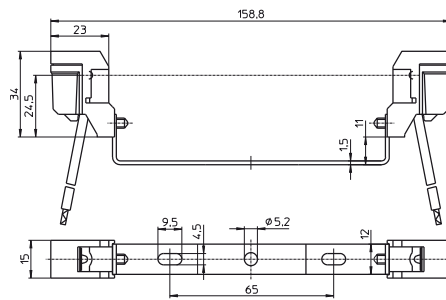

RX7s lampholder

Casing: PPS, black, T220

Contact pin: Cu, silver bulb

Nominal rating: 2/250/5 kV

Leads: Cu tinned, stranded conductors 1 mm²,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M5

Weight: 46.1 g, unit: 200 pcs.

Type: 34336 contact distance 132 mm

Ref. No.: 529846

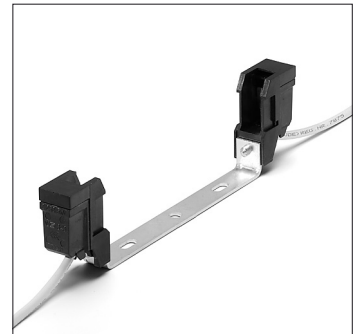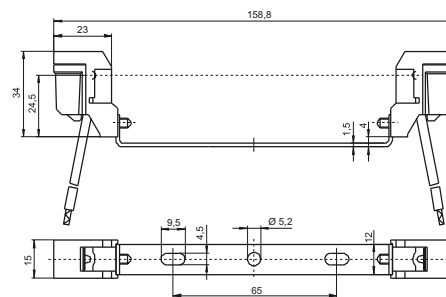

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/1000/5 kV

Lead: Cu tinned, stranded conductors 1 mm²,



Si-insulation max. Ø 3.6 mm, length: 200 mm

Fixing screw M4

Weight: 26.2 g, unit: 300 pcs.

Type: 32301

Ref. No.: 100913

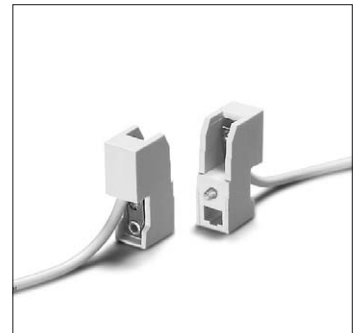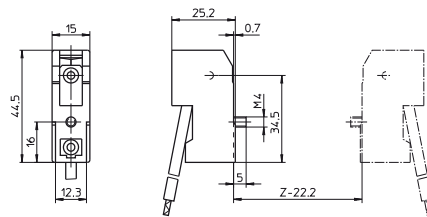

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/1000/5 kV

Leads: Cu tinned, stranded conductors 1 mm²,

Si-insulation max. Ø 3.6 mm, length: 200 mm



Oblong holes for screws M4

Central hole for screw M4

Weight: 74.8 g, unit: 200 pcs.

Type: 32311 contact distance: 114.2 mm

Ref. No.: 100921

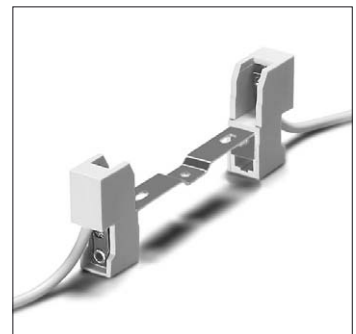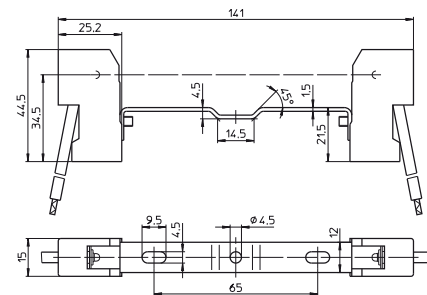

Partly enclosed RX7s lampholder

Casing: ceramic, T350

Contact pin: Cu, silver bulb

Nominal rating: 4/1000/5 kV

Leads: Cu tinned, stranded conductors 1 mm²,

Si-insulation max. Ø 3.6 mm, length: 200 mm

Oblong holes for screws M4

Central tapped holes M4

Weight: 76 g, unit: 200 pcs.

Type: 32321 contact distance: 114.2 mm

Ref. No.: 100922

