

GX23 Lampholders for Twin-tube Lamps, GX23-2 Lampholders for Quad-tube Lamps

For Single-ended Compact Fluorescent Bi-pin Lamps 13W

Nominal rating: 75W/600V

Degree of protection: IP20

Fatigue-free stainless lamp carrier spring

Ensure rotation stop when using
the central-mounting hole

Quick-connect twin terminals: 18AWG solid
or stranded solder-dipped

All products in this chapter carry a T rating
of T140 acc. to IEC standards

GX23 and GX23-2 horizontal

flush-mount lampholder

Casing: PBT GF, white



Lateral mounting holes for #8 screws (M4)

Central-mounting hole for #4 screw (M3)

Weight: 14g, packing qty.: 500 pcs.

Type: 35340

Ref. No.: 101375

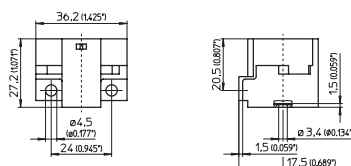

GX23 and GX23-2 2-hole vertical

base mount lampholder

Casing: PBT GF, white



Rear mounting holes 3.8mm (0.150") dia.

Central-mounting hole for #4 screw (M3)

Weight: 12g, packing qty.: 500 pcs.

Type: 35348

Ref. No.: 101377



GX23 and GX23-2 4-hole vertical

base mount lampholder

Casing: PBT GF, white

Rear mounting holes 3.8mm (0.150") dia.


Rear oblong holes for #4 screws (M3)

Central-mounting hole for #4 screw (M3)

Weight: 12g, packing qty.: 500 pcs.

Type: 35350

Ref. No.: 101379



GX23 and GX23-2 horizontal

snap-in mount lampholder

Casing: PBT GF, white

Snap-in foot for cut-out 10x20mm (0.394x0.787")
for wall thickness 0.8–1.3mm (0.031–0.051")

Weight: 12g, packing qty.: 500 pcs.

Type: 35351

Ref. No.: 101381

