





G24, GX24 vertical 2-hole or cover cap mount lampholders
Casing: PBT GF, white, T140
Nominal rating: 75 W/600 V
Rear slip hole for self-tapping screws acc. to ISO 1481/7049-ST4.2-C/F
Plain casing
Front slip hole for screws M3

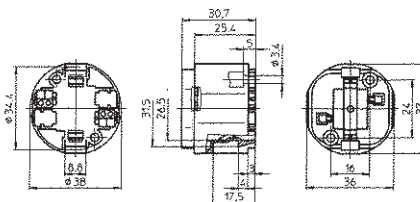

Type	Ref. No.	Base	Lamp	Output [W]	Weight [g]	Unit [pcs.]
35815	107858	G24d-1/GX24d-1	TC-D/TC-T	8, 10, 13 / 13	17.5	500
35845	107859	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	17.5	500
35865	107860	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	17.5	500
35915	107862	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	17.5	500
35945	107864	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	17.5	500
35965	107866	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	17.5	500
35935	508428	GX24q-3/-4*	TC-TEL	26, 32, 42	17.5	500
35985	500107	G24q-4/GX24q-4	TC-TEL	42	17.5	500

* Lampholder 508428 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

G24, GX24 horizontal snap-in mount lampholders
Casing: PBT GF, white, T140
Nominal rating: 75 W/600 V
Lamp position: 45°
Snap-in foot for cut-out 10x20 mm



Type	Ref. No.	Base	lamp	Output [W]	Weight [g]	Unit [pcs.]
35813	101412	G24d-1/GX24d-1	TC-D/TC-T	8, 10, 13 / 13	17.0	500
35843	101436	G24d-2/GX24d-2	TC-D/TC-T	18 / 18	17.0	500
35863	101450	G24d-3/GX24d-3	TC-D/TC-T	26 / 26	17.0	500
35913	101460	G24q-1/GX24q-1	TC-DEL/TC-TEL	10, 13 / 13	17.0	500
35943	101468	G24q-2/GX24q-2	TC-DEL/TC-TEL	18 / 18	17.0	500
35963	101473	G24q-3/GX24q-3	TC-DEL/TC-TEL	26 / 26, 32	17.0	500
35933	505738	GX24q-3/-4*	TC-TEL	26, 32, 42	17.0	500

* Lampholder 505738 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.