

2G11 Lampholders for Twin-tube 4-pin Lamps

For Single-ended Compact Fluorescent Twin-tube 4-pin Lamps

Nominal rating: 660W/600V

Degree of protection: IP20

All products in this chapter carry a T rating of T140 acc. to IEC standards

Quick-connect twin terminals: 18AWG solid or stranded solder-dipped (lamp circuit)

Quick-connect terminals: 18AWG solid or stranded solder-dipped (starter circuit)

2G11 back panel or bracket mount lampholders

Casing: PBT GF, white

Lateral pivots for bracket 105824 (see page 72)

Rear mounting holes for self-tapping #8 screws


Front mounting holes for #4 screws (M3)

Weight: 14g, packing qty.: 500 pcs.

Type: 36051

Ref. No.: 101489

Ref. No.: 532687 with internal shunt



2G11 flush-mount lampholders

Casing: PBT GF, white

Lateral mounting holes for #8 screws (M4)

Rear mounting holes for self-tapping #8 screws


Front mounting holes for #4 screws (M3)

Weight: 14g, packing qty.: 500 pcs.

Type: 36050

Ref. No.: 101485

Ref. No.: 532685 with internal shunt

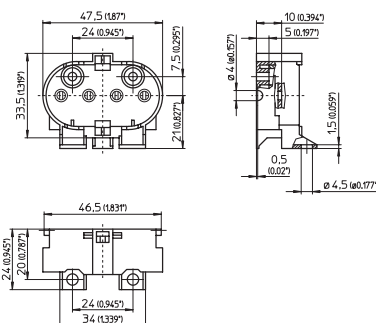

2G11 snap-in lampholders

Casing: PBT GF, white

Lamp position: vertical

Rear mounting holes for self-tapping #8 screws


Front mounting holes for #4 screws (M3)

Weight: 14g, packing qty.: 500 pcs.

Type: 36052

Ref. No.: 101491

Ref. No.: 532689 with internal shunt



2G11 snap-in lampholders

Casing: PBT GF, white

Rear mounting holes for self-tapping #8 screws

Front mounting holes for #4 screws (M3)

Option for bottom wiring

Weight: 14g, packing qty.: 500 pcs.

Type: 36053

Ref. No.: 101493

Ref. No.: 532691 with internal shunt

