

Starterholders

For Starters (acc. to IEC 60155)

Nominal rating: 660W/250V

Degree of protection: IP20

All products in this chapter carry a T rating of T110 acc. to IEC standards

Snap-in starterholder

Material: PC, white

Push-In terminals: 18AWG solid


Front and base split pins for wall thickness up to 1.2mm (0.047")

Degree of protection starterholder foot/ luminaire: IP40

Weight: 2.7g, packing qty.: 1000 pcs.

Type: 02110

Ref. No.: 109784

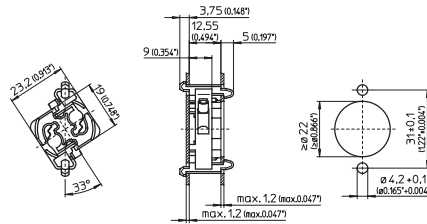

Flush-mount starterholder

Material: PC, white


Push-In terminals: 18AWG

Mounting holes for #4 screws (M3)

Weight: 4g, packing qty.: 1000 pcs.

Type: 02150

Ref. No.: 100069

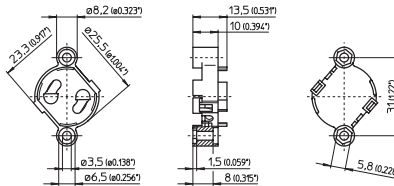

Snap-in starterholder

Material: PC, white

Push-In terminals: 18AWG


Front fixing clips for wall thickness

0.6–1mm (0.024–0.039")

Weight: 3.1g, packing qty.: 1000 pcs.

Type: 02170

Ref. No.: 106818

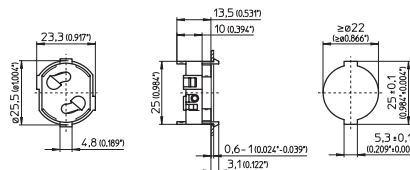

Flush-mount starterholder

Material: PC, white

Push-In terminals: 18AWG

Mounting holes for #4 screws (M3)

Weight: 3.7g, packing qty.: 1000 pcs.

Type: 43100

Ref. No.: 101631

