

G10q Lampholders, Accessories

For fluorescent lamps T-R

G10q push-fit lampholder

Casing: PC, white, T110

Spring bracket Ø 32 mm: CrNi-steel

Nominal rating: 2/500

Push-in terminals: 0.5–1 mm²


Lamp axis: 23 mm

Push-fit foot for wall thickness up to 1.2 mm

Weight: 8.4 g, unit: 500 pcs.

Type: 40100

Ref. No.: 101528



Lamp support for T-R lamps

For lampholder 101528

Material: PC, white

Spring bracket Ø 32 mm: CrNi-steel


Lamp axis: 23 mm

Push-fit foot for wall thickness up to 1.2 mm

Weight: 4.4 g, unit: 500 pcs.

Type: 40150

Ref. No.: 101532

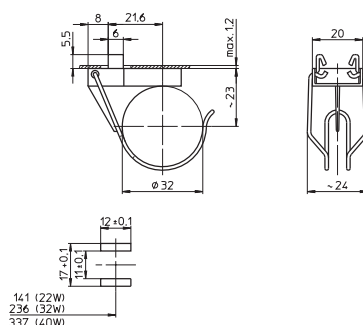

G10q surface-mounted lampholder

Casing: PC, white, T110

Spring bracket Ø 32 mm: CrNi-steel

Nominal rating: 2/250

Connection leads: H05V2-U 1X0.75,
max. 105 °C, length: 270 mm



Lamp axis: 35 mm

Fixing plates with tapped holes M4

Weight: 25 g, unit: 250 pcs.

Type: 58016

Ref. No.: 102409



Lamp support for T-R lamps

For lampholder 102409

Material: PC, white

Spring bracket Ø 32 mm: CrNi-steel

Lamp axis: 35 mm

Fixing plates with tapped holes M4

Weight: 8 g, unit: 500 pcs.

Type: 58001

Ref. No.: 102407

