

Medium-base Lampholders

For HID Lamps

Medium-base lampholders

Material: porcelain, white

Nominal rating: 4A/250V/5kV pulse rated

Terminals: bushings with set screws 18–14AWG solid

Screw shell insert: zinc-plated steel

Contacts: nickel-plated brass


Spring-loaded central contact

Weight: 64g, packing qty.: 200 pcs.

Type: 62609/62610

Ref. No.: 109459 oblong holes
for #8 screws (M4)

Ref. No.: 525523 bushings for #4 screws (M3)

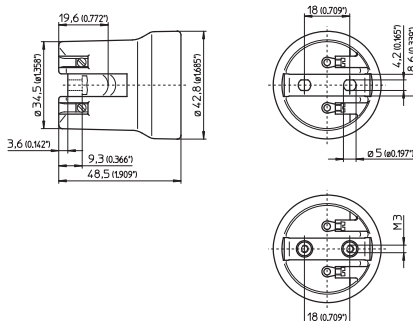

C US
E110298

Medium-base lampholder

Material: porcelain, white

Nominal rating: 4A/250V/5kV pulse rated

Terminals: bushings with set screws 18–14AWG solid

Screw shell insert: zinc-plated steel

Contacts: nickel-plated brass


Spring-loaded central contact

Oblong holes for #8 screws (M4)

Weight: 61g, packing qty.: 200 pcs.

Type: 62030

Ref. No.: 102597

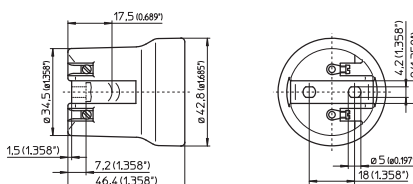

C US
E110298

Medium-base lampholders

Casing: PET GF

Profiled shape, short externally body

40x2.5 for screw rings (see page 171)

Maximum operating temperature: 155°C

Nominal rating: 660W/250V/4kV pulse rated

Quick-connect twin terminals: 18–14AWG solid

For cover caps


Rear mounting holes for self-tapping #7 screws

Weight: 15.4 g, packing qty.: 500 pcs.

Type: 64707

Ref. No.: 504262 white

Ref. No.: 506381 black

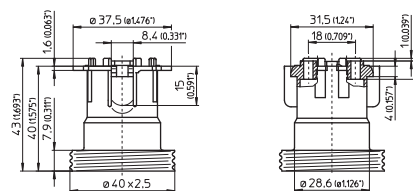

C US
E110298