
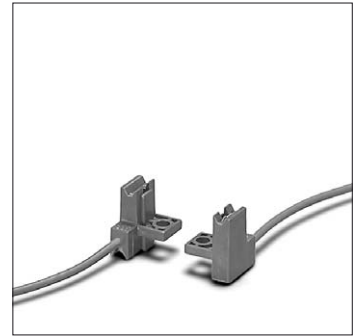


G53 Lamp Connectors

For low-voltage halogen incandescent lamps

G53 lamp connector
 Casing: PPS, black
 Nominal rating: 10/24
 Contacts: CuNiZn
 Lead: Cu tinned, stranded conductors 0.75 mm²,
 Si-insulation, length: 140 mm
 Fixing hole for screw M4
 Lead exit: lateral
 Weight: 4.4 g, unit: 1000 pcs.
 Type: 33100
Ref. No.: 107694

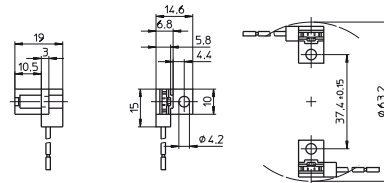


B15d, BA15d Lampholders

For low-voltage and mains voltage halogen incandescent lamps

One-piece contact pins with screw terminals
 to reduce voltage drop.
 When using lampholders without cap it has to
 be ensured protection from electric shock as well
 as sufficient creepage distances and clearances
 from live parts on the back of lampholders.

B15d, BA15d lampholders
 Casing with fixing flange: zinc-coated polished steel
 Insert: ceramic, T230
 Nominal rating: 8/250
 Fixing holes for screws M3
 Weight: 15/16 g, unit: 500 pcs.
 Type: 78100
Ref. No.: 102923
 Type: 78101 with earth terminal
Ref. No.: 102925



B15d, BA15d lampholders
 Casing with fixing bracket:
 zinc-coated polished steel
 Insert: ceramic, T230
 Nominal rating: 8/250
 Fixing holes for screws M3
 Weight: 17/18 g, unit: 500 pcs.
 Type: 78102
Ref. No.: 102927
 Type: 78103 with earth terminal
Ref. No.: 102929

