




G24, GX24 horizontal or vertical flush mount lampholders  
 Casing: PBT GF, white, T140  
 Nominal rating: 75 W/600 V  
 Base fixing holes for self tapping screws acc. to ISO 1481/7049-ST2.9-C/F  
 Base oblong holes for screws M4  
 Rear fixing holes for self tapping screws acc. to ISO 1481/7049-ST2.9-C/F and ST4.2-C/F  
 Front slip holes for screws M3

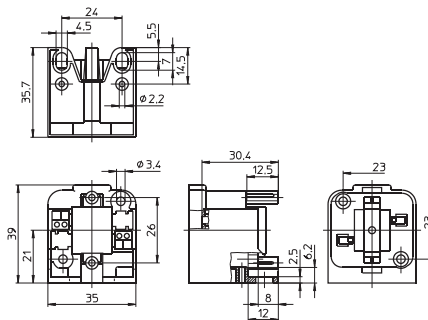

| Type  | Ref. No.      | Base           | Lamp          | Output (W)     | Weight (g) | Unit (pcs.) |
|-------|---------------|----------------|---------------|----------------|------------|-------------|
| 35817 | <b>108552</b> | G24d-1/GX24d-1 | TC-D/TC-T     | 8, 10, 13 / 13 | 17.5       | 500         |
| 35847 | <b>108553</b> | G24d-2/GX24d-2 | TC-D/TC-T     | 18 / 18        | 17.5       | 500         |
| 35867 | <b>108554</b> | G24d-3/GX24d-3 | TC-D/TC-T     | 26 / 26        | 17.5       | 500         |
| 35917 | <b>108556</b> | G24q-1/GX24q-1 | TC-DEL/TC-TEL | 10, 13 / 13    | 17.5       | 500         |
| 35947 | <b>108557</b> | G24q-2/GX24q-2 | TC-DEL/TC-TEL | 18 / 18        | 17.5       | 500         |
| 35967 | <b>108558</b> | G24q-3/GX24q-3 | TC-DEL/TC-TEL | 26 / 26, 32    | 17.5       | 500         |
| 35987 | <b>108559</b> | G24q-4/GX24q-4 | TC-TEL        | 42             | 17.5       | 500         |

G24, GX24 vertical 2-hole mount lampholders  
 Nominal rating: 75 W/600 V  
 Casing: PBT, white  
 External thread 40x2.5 IEC 60399  
 With rotary lock function for lamp  
 Front slip holes for screws M3

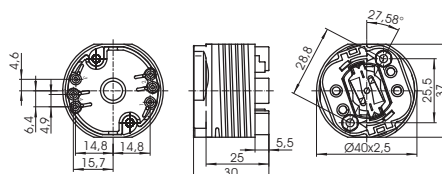

| Type  | Ref. No.      | Base               | Lamp          | Output (W)      | Weight (g) | Unit (pcs.) |
|-------|---------------|--------------------|---------------|-----------------|------------|-------------|
| 45940 | <b>507993</b> | G24q-2/GX24q-2     | TC-DEL/TC-TEL | 18 / 18         | 20.2       | 500         |
| 45960 | <b>507994</b> | G24q-3/GX24q-3     | TC-DEL/TC-TEL | 26 / 26, 32     | 20.2       | 500         |
| 45980 | <b>507995</b> | G24q-4/GX24q-4     | TC-TEL        | 42              | 20.2       | 500         |
| 45930 | <b>507992</b> | G24q-3/GX24q-3/-4* | TC-TEL        | 26 / 26, 32, 42 | 20.2       | 500         |

\* Lampholder 507992 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42 W.

G24q-5, GX24q-5 vertical 2-hole mount lampholders for triple tube lamps 57 W  
 Casing: PPS, black, T150  
 Plain casing  
 With rotary lock function for lamp  
 Front slip holes for screws M3  
 Weight: 28 g, unit: 500 pcs.  
 Type: 45990  
**Ref. No.: 508159**

