



2GX7 Lampholders for Twin-tube 4-pin Lamps

For Single-ended Compact Fluorescent 4-pin Lamps 13W



Nominal rating: 75W/600V
 Degree of protection: IP20
 Front mounting holes for #4 screws (M3)
 Fatigue-free stainless lamp carrier springs
 All products in this chapter carry a T rating
 of T140 acc. to IEC standards

Quick-connect twin terminals: 18AWG solid
 or stranded solder-dipped (lamp circuit)
 Quick-connect terminals: 18AWG solid
 or stranded solder-dipped (starter circuit)




2GX7 snap-in lampholder
 Casing: PBT GF, white
 Snap-in foot for cut-out 10x20mm (0.394x0.787")
 Weight: 17g, packing qty.: 500 pcs.
 Type: 35613
Ref. No.: 500575



2GX7 snap-in lampholder
 Casing: PBT GF, white
 Rear mounting hole for self-tapping #8 screw
 Front mounting holes for #4 screws (M3)
 Locking of the lampholder by a 15° turn
 Weight: 15g, packing qty.: 500 pcs.
 Type: 35620
Ref. No.: 109237



2GX7 horizontal flush-mount lampholder
 Casing: PBT GF, white
 Base mounting holes for self-tapping #4 screws
 Rear mounting holes for self-tapping #8 screws
 Base oblong mounting holes for #8 screws (M4)
 Weight: 17g, packing qty.: 500 pcs.
 Type: 35621
Ref. No.: 109239

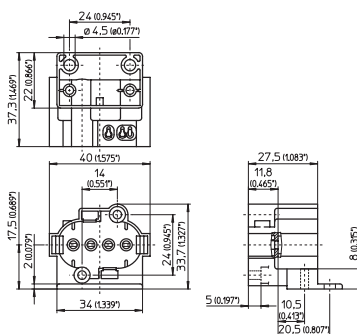

2GX7 back panel mount lampholder
 Casing: PBT GF, white
 Rear mounting holes for self-tapping #8 screws
 Front mounting holes for #4 screws (M3)
 Weight: 14g, packing qty.: 500 pcs.
 Type: 35622
Ref. No.: 109241

