



2GX7 Lampholders for Twin-tube 4-pin Lamps

For Single-ended Compact Fluorescent 4-pin Lamps 13W



Nominal rating: 75W/600V
Degree of protection: IP20
Front mounting holes for #4 screws (M3)
Fatigue-free stainless lamp carrier springs
All products in this chapter carry a T rating of T140 acc. to IEC standards

Quick-connect twin terminals: 18AWG solid or stranded solder-dipped (lamp circuit)
Quick-connect terminals: 18AWG solid or stranded solder-dipped (starter circuit)



2GX7 snap-in lampholder
Casing: PBT GF, white
Snap-in foot for cut-out 10x20mm (0.394x0.787")
Weight: 17g, packing qty.: 500 pcs.
Type: 35613
Ref. No.: 500575



2GX7 snap-in lampholder
Casing: PBT GF, white
Rear mounting hole for self-tapping #8 screw
Front mounting holes for #4 screws (M3)
Locking of the lampholder by a 15° turn
Weight: 15g, packing qty.: 500 pcs.
Type: 35620
Ref. No.: 109237



2GX7 horizontal flush-mount lampholder
Casing: PBT GF, white
Base mounting holes for self-tapping #4 screws
Rear mounting holes for self-tapping #8 screws
Base oblong mounting holes for #8 screws (M4)
Weight: 17g, packing qty.: 500 pcs.
Type: 35621
Ref. No.: 109239

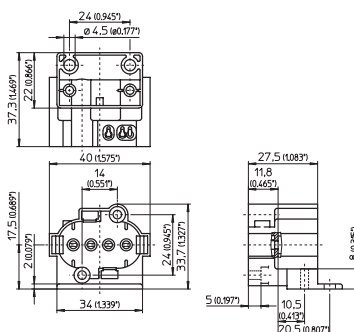

2GX7 back panel mount lampholder
Casing: PBT GF, white
Rear mounting holes for self-tapping #8 screws
Front mounting holes for #4 screws (M3)
Weight: 14g, packing qty.: 500 pcs.
Type: 35622
Ref. No.: 109241

