

Push-through Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

Twist and Lock Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

Nominal rating: 660W/600V

Degree of protection: IP20

Frontplate made of heat resistant PBT GF

Pin support for reliable contact

Push-In twin terminals: 18AWG

solid or stranded solder-dipped

US patent 6,364,679

Max. permissible temperature at

the rear side of the lampholder: T_m 110°C

Lampholders with integrated starterholder have

Push-In twin terminals for the lamp circuit

and Push-In terminals for the starter circuit.

All products in this chapter carry a T rating

of T140 acc. to IEC standards

Push-through lampholders for T8 and T12 lamps

Lamp axis: 31mm (1.220"), casing: PC, white
Lateral fixing clips for wall thickness 0.4–2mm
(0.016–0.079")

Weight: 7.8g, packing qty.: 1000 pcs.

Type: 28700/28725 with stop


Ref. No.: 109342

Ref. No.: 109376 internally shunted

Type: 28701/28726 without stop

Ref. No.: 109343

Ref. No.: 109377 internally shunted

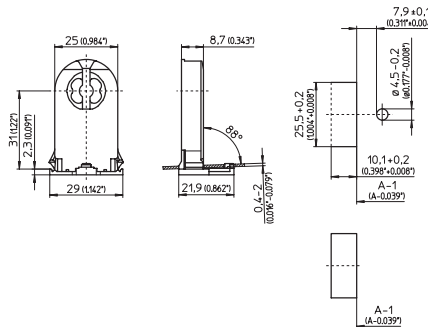

Push-through lampholders for T8 and T12 lamps

Lamp axis: 23mm (0.906"), casing: PC, white
Lateral fixing clips for wall thickness 0.4–2mm
(0.016–0.079")

Weight: 6.6g, packing qty.: 1000 pcs.

Type: 29100/29125 with stop


Ref. No.: 109346

Ref. No.: 109371 internally shunted

Type: 29101/29126 without stop

Ref. No.: 109529

Ref. No.: 109372 internally shunted

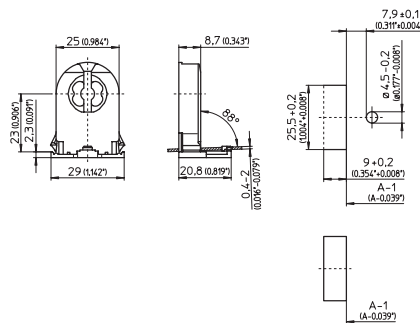

Push-through lampholders for T8 lamps

Lamp axis: 16mm (0.630")

Casing: PC, white

Nominal rating: 2A/500V

Lateral fixing clips for wall thickness 0.4–2mm
(0.016–0.079")

Weight: 4.7/4.5g, packing qty.: 1000 pcs.

Type: 29300 with stop

Ref. No.: 509134

Ref. No.: 509136 internally shunted

Type: 29301 without stop

Ref. No.: 509135

Ref. No.: 509137 internally shunted

