

RX7s Lampholders

APPLICATION and PERFORMANCE SPECIFICATION

Description: RX7s Lampholders for double ended HID lamps.

- 32301 & 32321 **Casing:** Ceramic **Contact Pin:** Cu, silver bulb
- 30602 **Casing:** Ceramic **Contact Pin:** Ni
- 32301 & 32321 660W/600V/5kV pulse
- 30602 1000W/600V/5kV pulse rated

Type	Ref. No.	Leads	Mounting	Drawing	Weight g	Packing Unit
32301	109711	18AWG, SF-2, 200°C - 200mm	Captive #8 Screw	A	29.4g	300
32321	109451	18AWG, SF-2, 200°C - 200mm	Oblong holes #8 screw (M4)	B	75g	200
30602	100732	18AWG, SF-2, 200°C - 305mm	Holes for #8 Screw (M4)	C	68g	25
30608	108913	18AWG, SF-2, 200°C - 430mm	Holes for #8 Screw (M4)	D	72g	25

Safety:

- Type 30602: cUL_{US} listed - (E105519)
- Type 32301 & 32321: cUR_{US} listed - (E105519)
- ENEC




Performance:


- Meets UL 496, CSA C22.2 No. 43
- Meets IEC Standard 60838-1

Warranty:


Universal Lighting Technologies warrants to the purchaser that each lampholder will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. Call **1-800-BALLASTx800** for technical assistance.

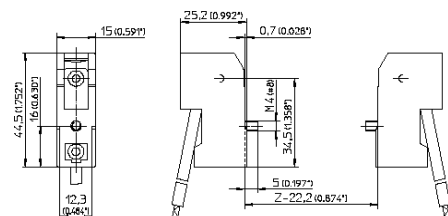


Drawing A

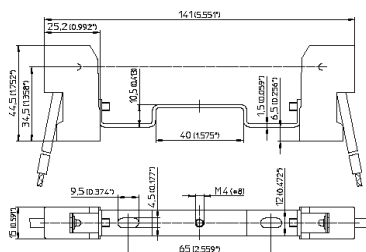

Drawing B

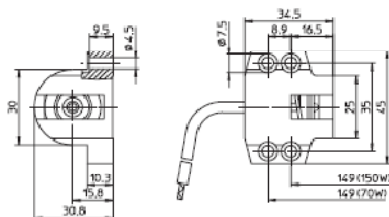

Drawing C

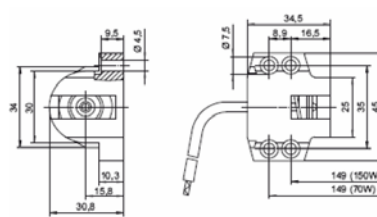

Drawing D