

# G4/GZ4 Lampholders


## For Low-voltage Halogen Incandescent Lamps

Lampholders for T-3 bi-pin lamps with base G4  
Lamp connectors for MRC11 bi-pin lamps  
with base GZ4  
Springs: stainless steel, heat resistant

Additional lead lengths and types upon request  
All T ratings in this chapter refer to IEC standards

G4 lampholder, GZ4 lamp connector  
Casing: PPS, multipoint contacts: CuNiZn  
T240 (acc. to IEC), maximum operating  
temperature: 220°C, nominal rating: 4A/24V  
Push-In terminals for stranded leads with ferrule on  
bare end of core 1.4–1.8mm (0.055–0.071") dia.  
(also available with mounted cables)  
Lampholder height: 16mm (0.630")  
Mounting holes for #4 screws (M3)  
Weight: 2.6g, packing qty.: 1000 pcs.  
Type: 30449



**Ref. No.: 108891**



G4 lampholder, GZ4 lamp connector  
Casing: PPS, black, multipoint contacts: steel  
T240 (acc. to IEC), maximum operating  
temperature: 220°C, nominal rating: 4A/24V  
Leads: Cu nickel-plated, stranded conductors 18AWG,  
PTFE insulation, black, length: 155mm (6")  
Lampholder height: 16mm (0.630")  
Mounting holes for #4 screws (M3)  
Weight: 5.7g, packing qty.: 1000 pcs.


Type: 30400

**Ref. No.: 534119**

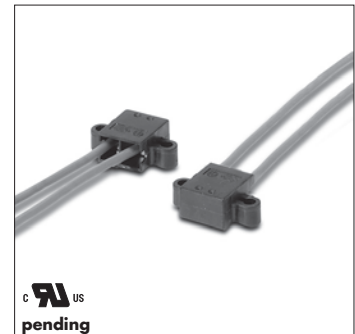

G4 lampholder, GZ4 lamp connector  
Casing: PPS, multipoint contacts: CuNiZn  
T240 (acc. to IEC), maximum operating  
temperature: 220°C, nominal rating: 4A/24V  
Push-In terminals for stranded leads with ferrule on  
bare end of core 1.4–1.8mm (0.055–0.071") dia.  
(also available with mounted cables)  
Lampholder height: 12.8mm (0.504")  
Mounting holes for #4 screws (M3)  
Weight: 2.4g, packing qty.: 1000 pcs., type: 30455

**Ref. No.: 109756**



G4 lampholder, GZ4 lamp connector  
Casing: PPS, black, multipoint contacts: steel  
T240 (acc. to IEC), maximum operating  
temperature: 220°C, nominal rating: 4A/24V  
Leads: Cu nickel-plated, stranded conductors 18AWG,  
PTFE insulation, black, length: 155mm (6")  
Lampholder height: 12.8mm (0.504")  
Mounting holes for #4 screws (M3)  
Weight: 5.5g, packing qty.: 1000 pcs.  
Type: 30450

**Ref. No.: 534124**

