

Type	Ref. No.	Base	Output (W)	Weight (g)	Packing qty. (pcs.)
72101	528116	G24d-1/GX24d-1	8, 10, 13 / 13	10.3	500
72102	528117	G24d-2/GX24d-2	18 / 18	10.3	500
72103	528118	G24d-3/GX24d-3	26 / 26	10.3	500
72111	528120	G24q-1/GX24q-1	10, 13 / 13	11.9	500
72112	528121	G24q-2/GX24q-2	18 / 18	11.9	500
72113	528122	G24q-3/GX24q-3	26 / 26, 32	11.9	500
72119	528126	GX24q-3/-4*	26, 32 / 42	11.9	500
72114	528123	GX24q-4	42	11.9	500
72115	528124	GX24q-5	57	12.5	500
72116	528125	GX24q-6	70	12.5	500

Shunted Version

72111	528128	G24q-1/GX24q-1	10, 13 / 13	11.9	500
72112	528129	G24q-2/GX24q-2	18 / 18	11.9	500
72113	528130	G24q-3/GX24q-3	26 / 26, 32	11.9	500
72119	528134	GX24q-3/-4*	26, 32 / 42	11.9	500
72114	528131	GX24q-4	42	11.9	500
72115	528132	GX24q-5	57	12.5	500
72116	528133	GX24q-6	70	12.5	500

* Lampholders 528126 and 528134 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.

G24, GX24 rotary lock lampholders

Externally threaded body 40x2.5

for screw rings (see p. 171)

Casing: PBT GF, white, T120 (acc. to IEC)

Nominal rating: 75W/600V


Quick-connect twin terminals: 18AWG

(lamp circuit)

Quick-connect terminals: 18AWG

(starter circuit)

Front mounting holes for #4 screws (M3)

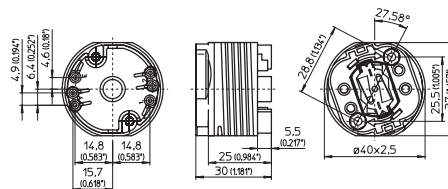

Type	Ref. No.	Base	Output (W)	Weight (g)	Packing qty. [pcs.]
45940	507993	G24q-2/GX24q-2	18 / 18	20.2	500
45960	507994	G24q-3/GX24q-3	26 / 26, 32	20.2	500
45930	507992	G24q-3/GX24q-3/-4*	26 / 26, 32 / 42	20.2	500
45980	507995	GX24q-4	42	20.2	500

* Lampholder 507992 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.

GX24q-5 rotary lock lampholder

for CFTR lamps 57 W

Plain casing

Casing: PPS, black, T150 (acc. to IEC)

Nominal rating: 75W/600V

Quick-connect twin terminals: 18AWG

(lamp circuit)

Quick-connect terminals: 18AWG (starter circuit)

Front mounting holes for #4 screws (M3)

Weight: 28g, packing qty.: 500 pcs.

Type: 45990

Ref. No.: 508159

