

# Slide-on Lampholders for Medium Bi-pin Fluorescent Lamps T8, T12

## Twist and Lock Lampholders for Medium Bi-pin Fluorescent Lamps T8 and T12

Nominal rating: 660W/600V

Degree of protection: IP20

Front plate made of heat resistant PBT GF

US patent 6,364,679

Max. permissible temperature at

the rear side of the lampholder:  $T_m$  110°C

All products in this chapter carry a T rating of T140 acc. to IEC standards

Slide-on lampholders for T8 and T12 lamps

Lamp axis: 23mm (0.906")

Casing: PC, white

Push-In twin terminals: 18AWG solid

or stranded solder-dipped

Side slots for wall thickness


0.5–0.8mm (0.020–0.031")

Weight: 7g, packing qty.: 1000 pcs.

Type: 29150/29155

**Ref. No.: 509609**

**Ref. No.: 509610** internally shunted

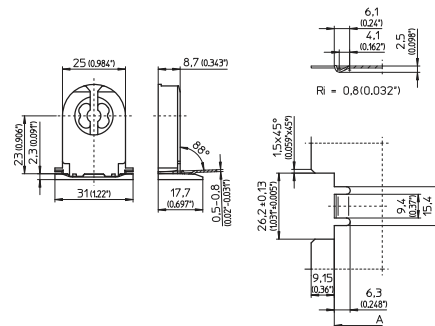

Lampholders for T8 lamps

Lamp axis: 16mm (0.630")

Casing: PC, white

Push-In terminals: 18AWG solid

or stranded solder-dipped

Slide slots for wall thickness

0.5–0.8mm (0.020–0.031")

Weight: 5g, packing qty.: 1000 pcs.

Type: 29550/29555

**Ref. No.: 509138**

**Ref. No.: 509139** internally shunted

