


Button lampholders for T8 and T12 lamps
 Casing: PC, white, rotor: PBT GF, T130 (acc. to IEC)
 Push-In twin terminals: 18AWG
 Thickness of lampholder: 13mm (0.512")
 Rear split pins for wall thickness up to 1.2mm (0.047")

Weight: 5/6g, packing qty.: 1000 pcs.

Type: 47105/47106

Ref. No.: 101685

Ref. No.: 101690 with spring adjustment

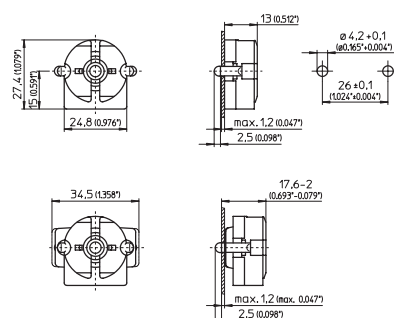


Button lampholder/starter combinations
 for T8 and T12 lamps, with starter attachment
 Casing: PC, white, rotor: PBT GF, T130 (acc. to IEC)
 Push-In twin terminals: 18AWG
 Thickness of lampholder: 13mm (0.512")
 Rear split pins for wall thickness up to 1.2mm (0.047")

Weight: 9/10g, packing qty.: 1000 pcs.

Type: 47205/47206

Ref. No.: 101712

Ref. No.: 101716 with spring adjustment

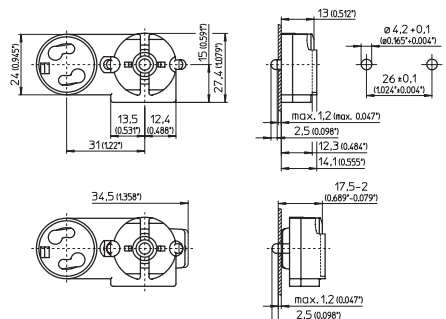

Button lampholders for T8 and T12 lamps
 Casing: PC, white, frontplate: PBT GF, white
 T140 (acc. to IEC), Push-In terminals: 18AWG
 Thickness of lampholder: 9.5mm (0.374")
 Rear split pins for wall thickness up to 1.2mm (0.047")
 US patent 6,364,679, weight: 4.4/5.1g
 Packing qty.: 1000 pcs., type: 47505


Ref. No.: 509162

Ref. No.: 509163 internally shunted

Type 47506 with spring adjustment

Ref. No.: 509164


Ref. No.: 509165 internally shunted

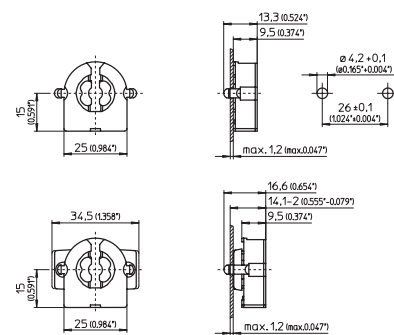

Button lampholders for T8 and T12 lamps
 Casing: PC, white, rotor: PBT GF
 T130 (acc. to IEC)
 Push-In twin terminals: 18AWG
 Thickness of lampholder: 9.5mm (0.374")
 Mounting holes for #4 screws (M3)
 Weight: 5/5.5g, packing qty.: 1000 pcs.
 Type: 47500/47502

Ref. No.: 101738

Ref. No.: 101740 with spring adjustment



Button lampholder/starter combination
 for T8 and T12 lamps, with starter attachment
 Casing: PC, white, rotor: PBT GF
 T130 (acc. to IEC)
 Push-In twin terminals: 18AWG
 Thickness of lampholder: 9.5mm (0.374")
 Mounting holes for #4 screws (M3)
 Weight: 8g, packing qty.: 1000 pcs.
 Type: 47600

Ref. No.: 101765

