

G24, GX24 flush-mount lampholders

Casing: PBT GF, white, T140 (acc. to IEC)


Nominal rating: 660W/600V

Push-In twin terminals: 18AWG (lamp circuit)

For G24q, GX24q lampholders:

Push-In terminals: 18AWG (starter circuit)

Front mounting holes for #4 screws (M3)

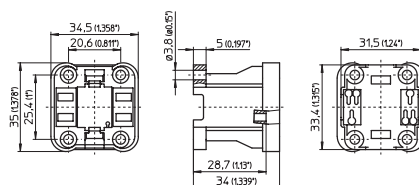

| Type                   | Ref. No.      | Base           | Output (W)     | Weight (g) | Packing qty. (pcs.) |
|------------------------|---------------|----------------|----------------|------------|---------------------|
| 71201                  | <b>527556</b> | G24d-1/GX24d-1 | 8, 10, 13 / 13 | 11.5       | 500                 |
| 71202                  | <b>527557</b> | G24d-2/GX24d-2 | 18 / 18        | 11.5       | 500                 |
| 71203                  | <b>527558</b> | G24d-3/GX24d-3 | 26 / 26        | 11.5       | 500                 |
| 71211                  | <b>527560</b> | G24q-1/GX24q-1 | 10, 13 / 13    | 12.9       | 500                 |
| 71212                  | <b>527561</b> | G24q-2/GX24q-2 | 18 / 18        | 12.9       | 500                 |
| 71213                  | <b>527562</b> | G24q-3/GX24q-3 | 26 / 26, 32    | 12.9       | 500                 |
| 71219                  | <b>527566</b> | GX24q-3/-4*    | 26, 32 / 42    | 12.9       | 500                 |
| 71214                  | <b>527563</b> | GX24q-4        | 42             | 12.9       | 500                 |
| 71215                  | <b>527564</b> | GX24q-5        | 57             | 13.5       | 500                 |
| 71216                  | <b>527565</b> | GX24q-6        | 70             | 13.5       | 500                 |
| <b>Shunted Version</b> |               |                |                |            |                     |
| 71211                  | <b>527568</b> | G24q-1/GX24q-1 | 10, 13 / 13    | 12.9       | 500                 |
| 71212                  | <b>527569</b> | G24q-2/GX24q-2 | 18 / 18        | 12.9       | 500                 |
| 71213                  | <b>527570</b> | G24q-3/GX24q-3 | 26 / 26, 32    | 12.9       | 500                 |
| 71219                  | <b>527574</b> | GX24q-3/-4*    | 26, 32 / 42    | 12.9       | 500                 |
| 71214                  | <b>527571</b> | GX24q-4        | 42             | 12.9       | 500                 |
| 71215                  | <b>527572</b> | GX24q-5        | 57             | 13.5       | 500                 |
| 71216                  | <b>527573</b> | GX24q-6        | 70             | 13.5       | 500                 |

\* Lampholders 527566 and 527574 may only be used in luminaires that are operated with electronic ballasts that have been certified according to the applicable standards and that cover the luminaire performance range of 26, 32 and 42W.