


HATCH

VS 60 WATT PLUG-IN



VS 60 WATT PLUG-IN

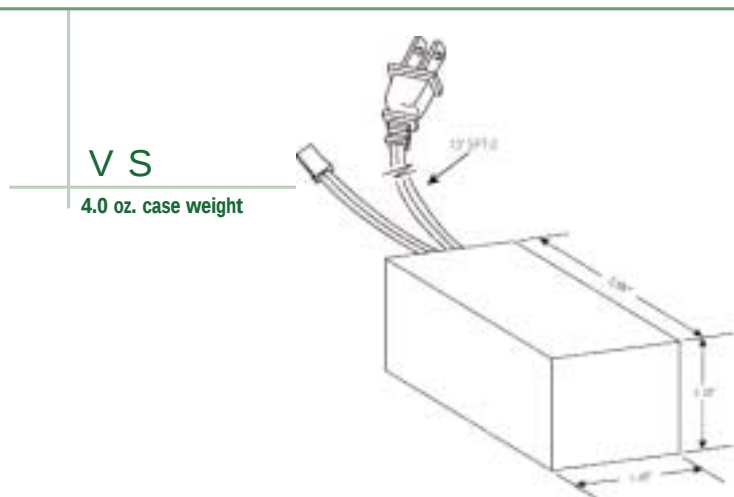

Electronic Low Voltage Transformers Features:

- High Reliability
- Moisture and Shock Resistant
- Emits No Audible Noise
- Low Harmonic Distortion
- High Power Factor
- Lightweight, Compact Design

Environmental Specifications

Maximum Case Temperature	80°C
Sound Rating	A+
Operating Humidity	95% relative humidity, non-condensating
Environmental Protection	Epoxy Sealed for moisture resistance and shock vibration resistance

Electrical/Mechanical Specifications

Input	120 V, 50/60 Hz
Enclosure Material	UL Flame Retardant, High Temperature, Engineering Resin
Color	Black
Weight	4 oz.
Power Factor	> 0.95
Operating Frequency	25 KHz
Total Harmonic Distortion	≤ 20%
Safety Standard	UL US LISTED (Class 2-up to 60 Watt only)
Input Leads	6", 18AWG stranded, with 10 Ft. Plug 105 degree C stripped 3/8" tinned
Output Leads	6", 18AWG stranded, 105 degree C stripped 3/8" tinned



VS 60 WATT PLUG-IN



P L U G - I N E L E C T R O N I C

Max Watts	Min Watts	Input Volts	Output Volts	Input Amps	Output Amps	Input Leads	Case Color	Hatch Item No.	Safety Listing
60	20	120	11.5	0.52	5.2	10'	Black	VS12-60SG	UL/ C-UL Listed Class 2