


Electrical Specifications

VZT-2TTS40

Brand Name	MARK 7 0-10V
Ballast Type	Electronic Dimming
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	277
Input Frequency	50/60HZ
Status	Discontinued

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts) (min/max)	Ballast Factor (min/max)	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
* FT40W/2G11/RS	2	40	50/10	0.28	16/76	0.05/0.88	10	0.99	1.6	1.16

Wiring Diagram

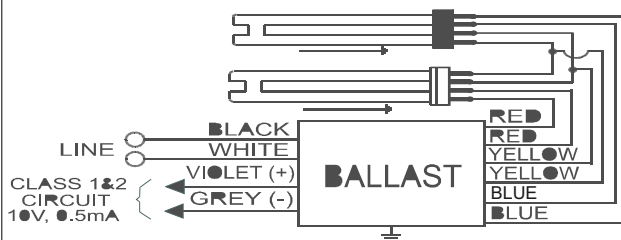


DIAG. 131

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	22	55.9	Yellow/Blue		0
White	22	55.9	Blue/White		0
Blue	26	66	Brown		0
Red	36	91.4	Orange		0
Yellow	26	66	Orange/Black		0
Gray	36	91.4	Black/White		0
Violet	36	91.4	Red/White		0

Enclosure

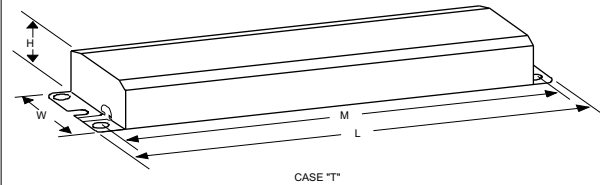

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
9.50 "	2.375 "	1.5 "	8.90625 "
9 1/2	2 3/8	1 1/2	8 29/32
24.1 cm	6 cm	3.8 cm	22.6 cm

Revised 07/29/2011



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.