

SYLVANIA

LEDVANCE Luminaires

Wall Pack Cutoff



Product Features

The Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 76% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in three wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

The housing is a perfect fit for replacing existing traditional luminaires and minimizes light pollution through its cut-off design. The luminaires are available with optional photo control. LEDVANCE luminaires assure optimum light engine performance for extended service and rated life (≥150,000 hours L₇₀).

Wattage Comparison Chart


Cutoff Wall Packs (UNV/347)

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	36 / 40	60% / 56%
100W HPS	120	36 / 40	70% / 70%
100W MH	130	36 / 40	72% / 72%
70W HPS	91	50 / 55	45% / 45%
100W HPS	120	50 / 55	58% / 58%
100W MH	130	50 / 55	62% / 62%
150W HPS	170	50 / 55	71% / 68%
150W MH	188	50 / 55	73% / 71%
175W MH	210	50 / 55	76% / 74%
175W MH	210	75 / 80	64% / 62%
250W MH	290	75 / 80	74% / 72%
250W HPS	295	75 / 80	75% / 73%

Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

Cutoff Wall Pack

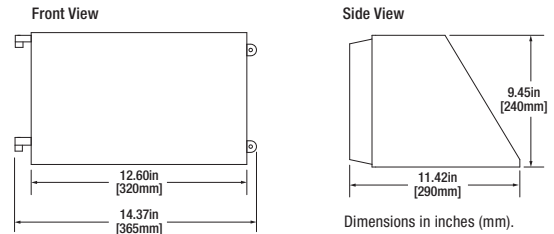

Specifications

Weight: UNV: 16.2lbs (7.4kg) 347V: 17lbs (7.9kg)

Construction: Two-piece cast aluminum alloy housing with powder coat paint finish and a glass lens. The standard color is bronze.

LED System: LED system with a life rating of ≥150,000 hours at L₇₀ @25°C. Luminaire efficacy up to 113 LPW.

Electrical: Offered in 36, 50, and 75 Watts, the luminaire is designed to operate through the 120-277 VAC universal voltage range. Offered in 40, 55, and 80 Watts, the luminaire is designed to operate at the 347VAC voltage range. The LED driver has a 4kV inherent surge suppression and is a constant current device, meeting UL1310 and UL48 Class 2 with built-in over temperature protection. The power factor is ≥90% and THD is ≤20%.

Color Characteristics: CRI>70; CCT of 4000K or 5000K.

Optics: Cutoff distribution with a flat tempered glass lens.

Installation: Luminaire mounts to exterior wall.

Operating Temperature: -40°F to +104°F (-40°C to +40°C); EM: +32°F to +104°F (0°C to +40°C).

Listings: cULus listed to UL1598 standards for wet locations.

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specifications subject to change without notice. IES files available online.



Ordering Guide

Item Number:

WALPAK	1C	/	XXX	XXX	7	XX	/	CO	/	BZ	/	X
Product Name	Generation		Wattage (UNV)	Voltage	CRI	Color Temp (CCT)		Optics		Color/Finish		Options
WALPAK	1C		036 = 36 Watts 050 = 50 Watts 075 = 75 Watts	UNV = 120-277V 347 = 347V	7 = >70	40 = 4000K* 50 = 5000K		CO = Cutoff Distribution		BZ = Bronze		Blank = No Option P = Photocontrol* E = Emergency**
			Wattage (347V)									
			040 = 40 Watts 055 = 55 Watts 080 = 80 Watts									

* Available in UNV only


** Made to order (MTO); Available in 50W UNV only



Photometric Data (UNV/347V)


WALPAK1C/036UNV740/CO/BZ

Isofootcandle Lines at 15' Mounting Height

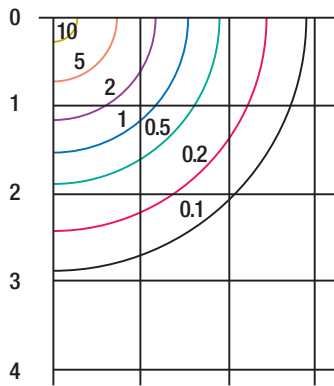


WALPAK1C/050UNV740/CO/BZ

Isofootcandle Lines at 18' Mounting Height

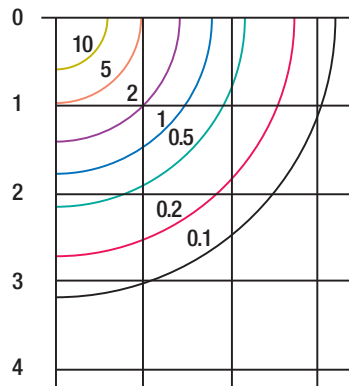

WALPAK1C/075UNV740/CO/BZ

Isofootcandle Lines at 20' Mounting Height

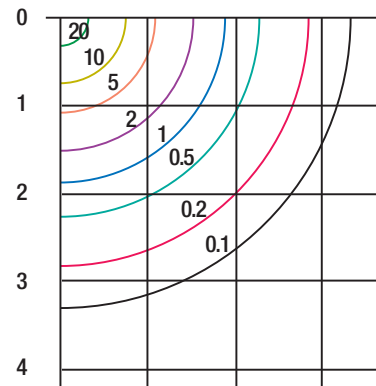

For other mounting heights apply the following multipliers:

Mounting Height	12'	15'	18'	20'	22'
Multiplier	1.56	1.00	0.69	0.56	0.46

Mounting Height	15'	18'	20'	22'	25'
Multiplier	1.44	1.00	0.81	0.67	0.52

Mounting Height	15'	18'	20'	22'	25'
Multiplier	1.78	1.23	1.00	0.83	0.64

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	CRI	Color Temp (CCT)	Distribution	Total Fixture Lumens	LPW*	DLC	BUG Rating	Options
74186	WALPAK1C/036UNV740/CO/BZ	36	120-277V	>70	4000K	Cutoff	3300	92	Std	B1-U0-G1	-
74189	WALPAK1C/036UNV750/CO/BZ	36	120-277V	>70	5000K	Cutoff	2900	82	Std	B1-U0-G1	-
74187	WALPAK1C/050UNV740/CO/BZ	50	120-277V	>70	4000K	Cutoff	5200	107	Std	B2-U0-G1	-
74190	WALPAK1C/050UNV750/CO/BZ	50	120-277V	>70	5000K	Cutoff	5000	102	Std	B2-U0-G1	-
74188	WALPAK1C/075UNV740/CO/BZ	75	120-277V	>70	4000K	Cutoff	6600	91	Std	B2-U0-G1	-
74191	WALPAK1C/075UNV750/CO/BZ	75	120-277V	>70	5000K	Cutoff	6400	88	Std	B2-U0-G1	-
74210	WALPAK1C/036UNV740/CO/BZ/P	36	120-277V	>70	4000K	Cutoff	3300	92	Std	B1-U0-G1	Photocontrol
74213	WALPAK1C/036UNV750/CO/BZ/P	36	120-277V	>70	5000K	Cutoff	2900	82	Std	B1-U0-G1	Photocontrol
74211	WALPAK1C/050UNV740/CO/BZ/P	50	120-277V	>70	4000K	Cutoff	5200	107	Std	B2-U0-G1	Photocontrol
74214	WALPAK1C/050UNV750/CO/BZ/P	50	120-277V	>70	5000K	Cutoff	5000	102	Std	B2-U0-G1	Photocontrol
74212	WALPAK1C/075UNV740/CO/BZ/P	75	120-277V	>70	4000K	Cutoff	6600	91	Std	B2-U0-G1	Photocontrol
74215	WALPAK1C/075UNV750/CO/BZ/P	75	120-277V	>70	5000K	Cutoff	6400	88	Std	B2-U0-G1	Photocontrol
72993	WALPAK1C/040347750/CO/BZ	40	347V	>70	5000K	Cutoff	4500	107	Std	B1-U0-G1	-
72994	WALPAK1C/055347750/CO/BZ	55	347V	>70	5000K	Cutoff	5500	101	Std	B2-U0-G1	-
72995	WALPAK1C/080347750/CO/BZ	80	347V	>70	5000K	Cutoff	8900	113	Std	B2-U0-G1	-
74497	WALPAK1C/050UNV840/CO/BZ/E (MTO)	50	120-277V	>70	4000K	Cutoff	5200	107	Std	B2-U0-G1	Emergency Battery Backup
74498	WALPAK1C/050UNV850/CO/BZ/E (MTO)	50	120-277V	>70	5000K	Cutoff	5000	102	Std	B2-U0-G1	Emergency Battery Backup

*LPW per LM79 report.

For further information and to learn more about utility rebates, contact your local SYLVANIA sales representative.

Options Information

Emergency Battery Backup:

Activates when normal power supply to fixture fails, providing a minimum of 500 lumens for at least 90 minutes.

Accessories and Replacement Parts

Item Number	Ordering Abbreviation	Item Description
74396	WALPAK1C/LENS/BZ	Replacement Lens with Frame